

零件图	成品图	客户图
		○





REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	JIN	2020-09-09

Technical Data

Material:
 Contact Material: Copper alloy
 Contact plating: Au or Sn Over Ni
 Insulator Material: See the table, UL94 V-0

Electrical:
 Rating current: 0.75Amps/contact max.
 Rating voltage : 250 V AC/DC
 Contact resistance: $\leq 20m\Omega$ /contact
 Insulation resistance: $\geq 500M\Omega$
 Withstanding Voltage: 300V AC/minute

Mechanical:
 Operating temperatures: Gold Plated: $-55^{\circ}C$ to $+105^{\circ}C$
 Tin plated: $-40^{\circ}C$ to $+105^{\circ}C$
 Soldering temperature: $+260^{\circ}C, 10S$ max(PA6T/PA9T/LCP)
 $+220^{\circ}C, 10S$ max(PBT).

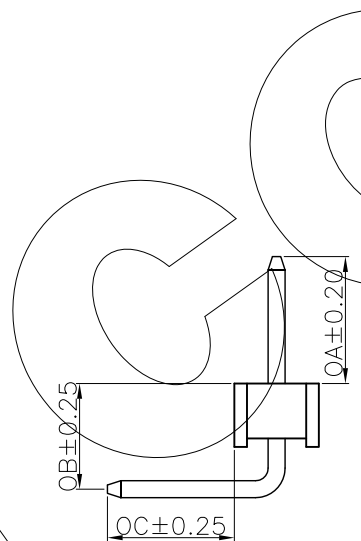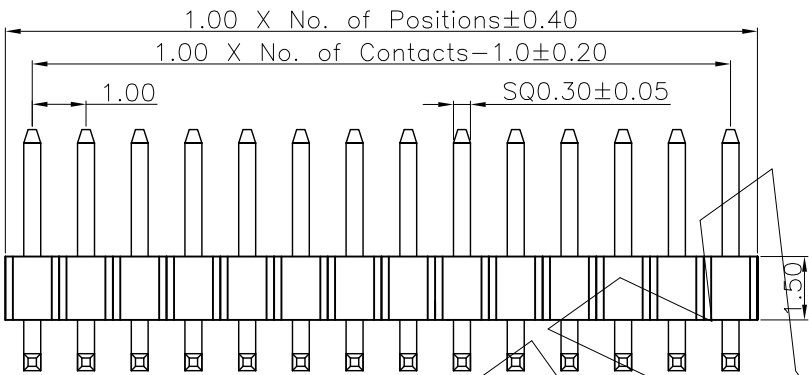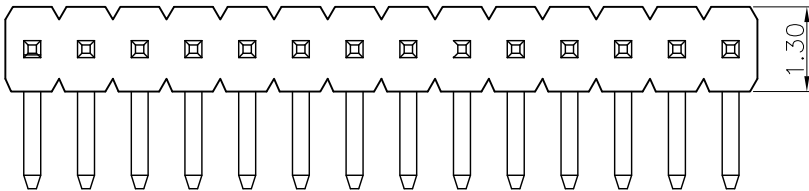

Recommended P.C.B Layout
 General Tolerance ± 0.05

	OA	OC	OB	PIN LENGHT
DIM.	2.00	1.50	2.00	5.90
	2.80	1.80	2.50	7.50
	3.50	2.30	3.00	9.20
	4.00	2.60	3.50	10.50

OA, OB and OC can be customized by customers

P136	11	XXX	XX	R	X	X	N	RXXX
Product Descriptions P136 H=1.5	Product Type 11 Single Row	No. of Positions XXX Poles	Pin Plating G0 GOLD FLASH G1 10" AU G6 AU10U" S1 SN+AU1U" S7 SN+AU15U" S8 SN+AU30U" T3 MATTE SN	Angle options R Ringht Angle	Insulator Material A PBT B PA66 C PA6T D LCP	Color B Black W White L Blue G Green Y Yellow R Red N Natural		Pin length(mm) L=XXX mm

ANYCONN® 东莞市恩康电子科技有限公司
 www.anyconn.com
 TEL:+86(0)769 8904 9672
 FAX:+86(0)769 8904 9671
 E-MAIL:sales@anyconn.com
DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE	DATE : 2020-09-11	TITLE:
ANGLE $\pm 5^{\circ}$	DRAWN : Songjun	PH1.00 H1.50mm Single Row Ringht Angle L=XXX mm Pin Header
X.XXX ± 0.15	CHECKED :	PART NO: P13611XXXXRXXNRXXX
X.XX ± 0.25	APPROVED :	
X.X ± 0.40	PROJECTON	
X. ± 0.50		REV: A0 UNIT: mm SCALE: 1:1 SIZE: A4 PAGE: 1/1