
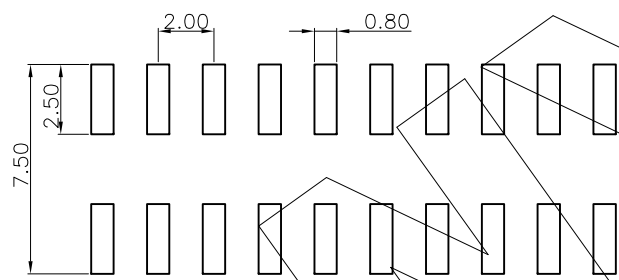
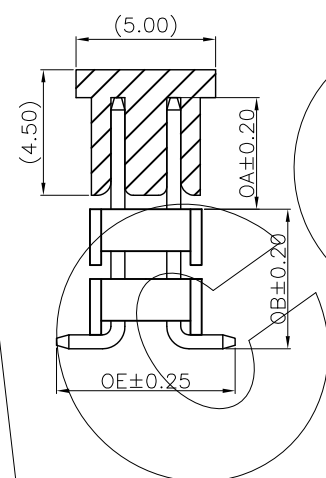
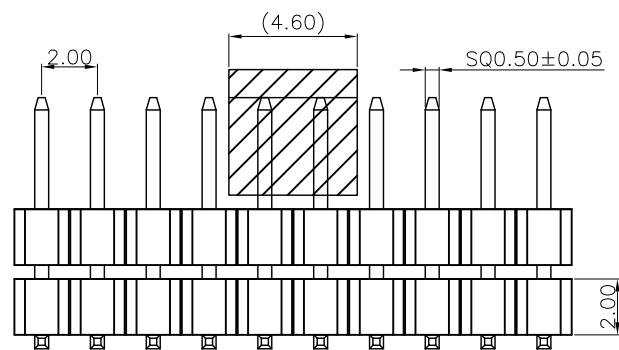


零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	JIN	2020-09-09

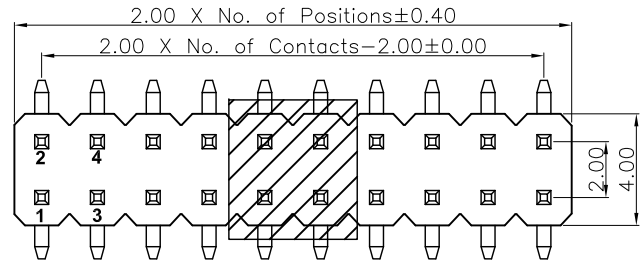

Recommended P.C.B Layout  
General Tolerance ±0.05

### Technical Data

Material:  
Contact Material: Copper alloy  
Contact plating: Au or Sn Over Ni  
Insulator Material: See the table, UL94 V-0

Electrical:  
Rating current: 0.75Amps/contact max.  
Rating voltage : 250 V AC/DC  
Contact resistance: ≤20mΩ/contact  
Insulation resistance: ≥1000MΩ  
Withstanding Voltage: 450V AC/minute

Mechanical:  
Operating temperatures: Gold Plated: -55°C to +105°C  
Tin plated: -40°C to +105°C  
Soldering temperature: +260°C, 10S max (PA6T/PA9T/LCP)  
+220°C, 10S max (PBT).

	OA	OE	OB	PIN LENGTH
DIM.	3.00	6.40	5.00	9.60
	5.50	6.40	6.00	13.10
	8.00	6.40	6.50	17.10
	12.00	6.40	7.50	22.10

OA, OB and OE can be customized by customers

<b>P118</b>	<b>22</b>	<b>XXX</b>	<b>XX</b>	<b>S</b>	<b>X</b>	<b>X</b>	<b>N</b>	<b>SXXX</b>
Product Descriptions P118 H=2.0	Product Type 22 DUAL ROW DUAL BASE	No. of Positions XXX Poles	Pin Plating G0 GOLD FLASH G1 1U* AU G6 AU10U* S1 SN+AU1U* S7 SN+AU15U* S8 SN+AU30U* T3 MATTE SN	Angle options S SMT	Insulator Material A PBT B PA66 C PA6T D LCP	Color B Black W White L Blue G Green Y Yellow R Red N Natural		Pin length(mm) L=XXXmm

**ANYCONN®** 东莞市恩康电子科技有限公司  
www.anyconn.com  
TEL:+86(0)769 8904 9672  
FAX:+86(0)769 8904 9671  
E-MAIL:sales@anyconn.com

**DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD**

TOLERANCE	DATE :	2020-09-11	TITLE:	2.0mm Pin Header Dual Row SMT Length XXX mm		
ANGLE ±5°	DRAWN :	Songjun	APPROVED :	PART NO: P11822XXXXXSXXXSXXX		
X.XXX ±0.15	CHECKED :			REV: A0	UNIT: mm	SCALE: 1:1
X.XX ±0.25	PROJECTON				SIZE: A4	PAGE: 1/1
X.X ±0.40						
X. ±0.50						