


零件图 成品图 客户图  
 RoHS COMPLIANT

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	D.Y.Y	2019-10-26

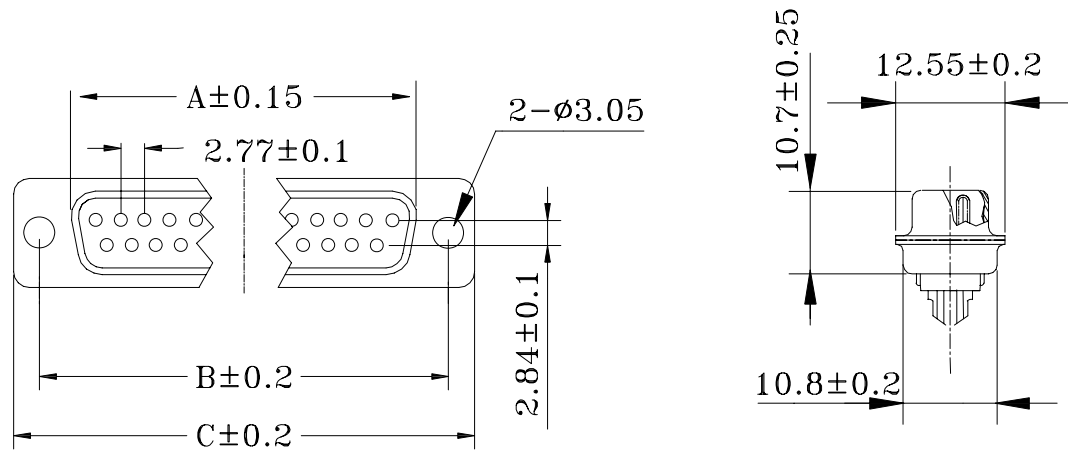


Product Specification  
 Material  
 Insulator : Glass-Filled Thermoplastic PBT  
 Contact : Copper alloy  
 Front shell : Steel, 100u" Tin Over 50u" min Copper  
 Back shell : Steel, 100u" Tin Over 50u" min Copper

Electrical  
 Contact Resistance : 20 milliohms  
 Max at 1 AMP DC.  
 Insulation Resistance : 1000  
 magohms at 500 VDC  
 Dielectric Withstanding Voltage :  
 1000 VAC/rms 60Hz for 1 minute  
 Current Rating : 3 AMP  
 Volatge Rating : 250 VAC/rms 60Hz

端子电镀前金后锡G/F

- 1、加前铆(不通孔)4-40 2、加后铆(通孔)4-40

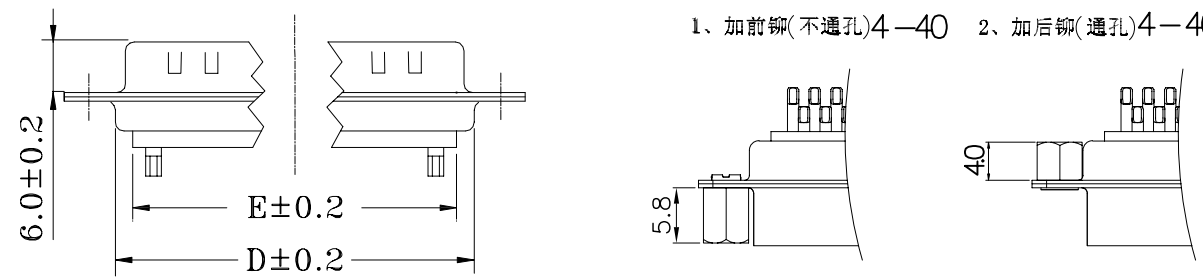

POS.	A	B	C	D	E
09	17.80	24.99	30.81	19.18	15.78
15	26.05	33.32	39.14	27.65	24.60
25	39.70	47.04	53.04	41.03	38.00
37	56.40	63.50	69.32	57.44	54.50

DS	M	D	XXX	XX	X	X	W	H
种类型号 Insulator Type M Male(公) F Female(母)	角度选项 Angel Options D Straight(180°) R RightAngle S 焊接式(180°)	Pin 位数 No. of Positions 009 Positions 015 Positions 025 Positions 037 Positions	电镀 Clip Plated G1 :Au1u" S1 :半金锡 S9 :半金锡30u"	塑胶类型 Insulator Type S 单排 D 双排 K 三排	塑胶颜色 Insulator Color 1 Black黑色 2 Brown褐色 3 White白色 4 Yellow黄色 5 Blue蓝色	螺丝 N 无螺丝 W 有螺丝	产品流水码 Series A B C D . . .	

**ENKCOM®** 东莞市恩康电子科技有限公司  
 www.enkcom.com DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE	DATE :	2019-10-26	TITLE:
ANGLE ±5°	DRAWN :	D.Y.Y	D-sub 公 DB SOLDER TYPE
X.XXX ±0.15	CHECKED :		PART NO: DSMDXXXXXXXXWH
X.XX ±0.25	APPROVED :		
X.X ±0.40	PROJECTON		
X. ±0.50	REV: A0	UNIT: mm	SCALE: 1:1
	SIZE: A4	PAGE: 1/1	