
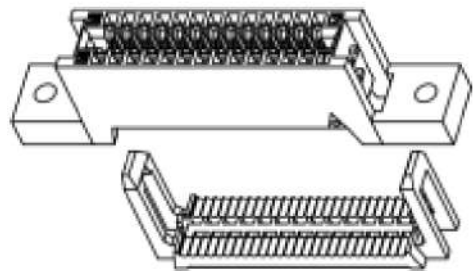






零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	Songjun	2022-6-8

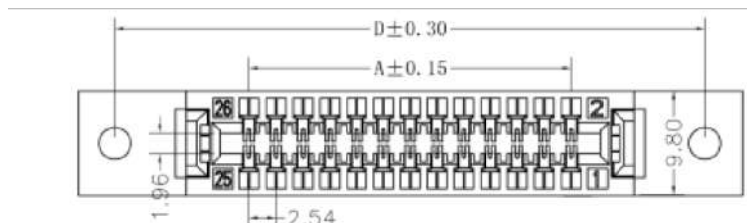


MATERIAL&FINISH
 Insulator: PBT Glass Fiber(UL94V-0)
 Contact : Brass
 Contact : Gold-Plated Over Nickel.

SPECIFICATIONS
 Current Rating :1A AC, DC
 Voltage Rating : 250V AC, DC
 Temperature Range:-40° C To+105° C
 Contact Resistance:20MΩ Max
 Insulation Resistance:1000MΩ Min
 Withstanding Voltage:500V AC/Min

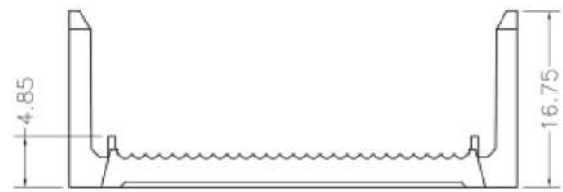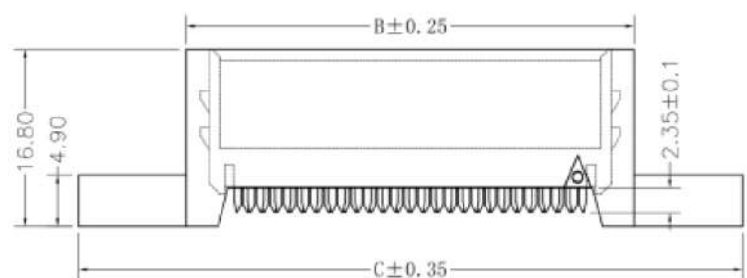

NUMBER OF POSITIONS	DIMENSION			
	A	B	C	D
10	10.16	22.00	42.60	35.27
14	15.24	27.08	47.68	40.35
16	17.78	29.62	50.22	42.89
20	22.86	34.70	55.30	47.97
24	27.94	39.78	60.38	53.05
26	30.48	42.32	62.92	55.59

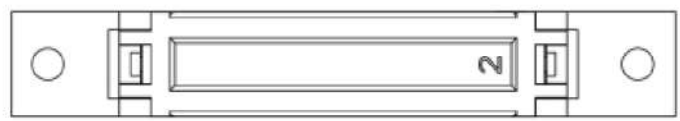

ANYCONN®
 www.enkcom.com
 TEL:+86(0)769 8904 9672
 FAX:+86(0)769 8904 9671
 E-MAIL:sales@anycom.tw

东莞市恩康电子科技有限公司
DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE	DATE :	2022-06-08	TITLE:	CE(二件式)全耳		
ANGLE ±5°	DRAWN :	Songjun	CHECKED :	PART NO: IDCEF303		
X.XXX ±0.15	CHECKED :					
X.XX ±0.25	APPROVED :					
X.X ±0.40	PROJECTON		REV: A0	UNIT: mm	SCALE: 1:1	SIZE: A4
X. ±0.50						PAGE: 1/1