


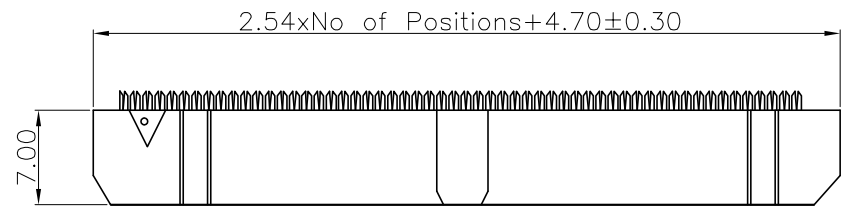

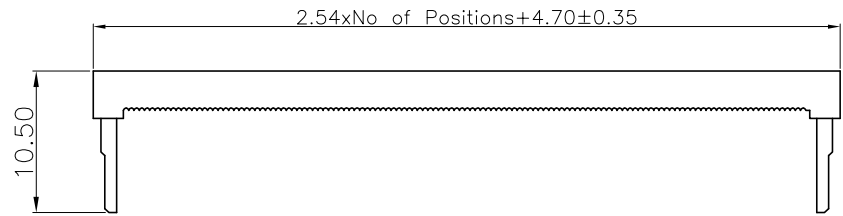



零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	S.J	2020-08-15

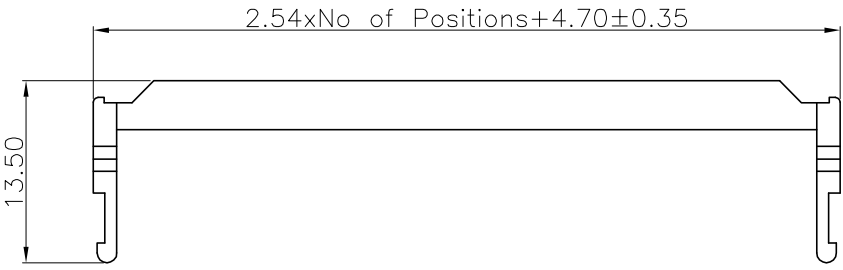

6p-8p without slot
 10-12P single slot
 14-64P double slot
 IDC main body: There is a difference
 between convex and non-convex

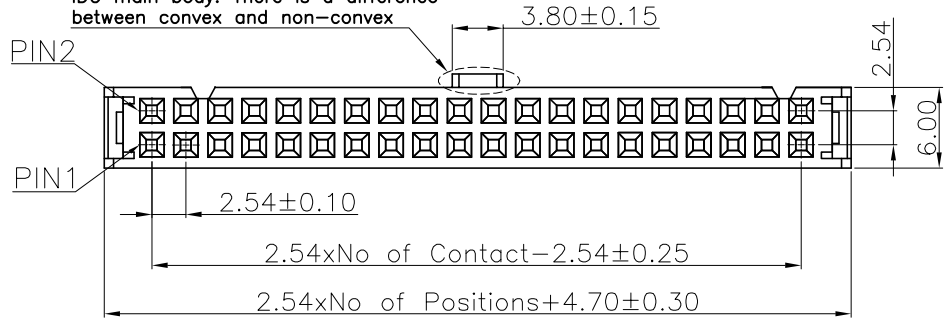

Technical Data

Material:
 Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Black Polyester UL94 V-0
 Standard: PBT+G/F30%

Electrical:
 Rating current: 1.0Amps/contact max.
 Rating voltage : 250 V AC/DC
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ
 Withstanding Voltage: 500V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: Gold Plated: -55°C to +105°C
 Tin plated: -40°C to +105°C
 Soldering temperature: +220°C max(PBT).

PART NO. IDCC XX XX A
 NO OF POS: 04 (2x2P) — Plating
 06 (2x3P) G1 Gold Flas
 SN Tin Plated

ENKCOM® www.enkcom.com TEL:+86(0)769 8904 9672 FAX:+86(0)769 8904 9671 E-MAIL:sales@anycom.tw		东莞市恩康电子科技有限公司 DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD	
TOLERANCE	DATE :	2020-08-15	TITLE:
ANGLE ±5°	DRAWN :	S.J	PH2.54mm IDC三件式
X.XXX ±0.15	CHECKED :		PART NO: IDCEF3A
X.XX ±0.25	APPROVED :		
X.X ±0.40	PROJECTON		
X. ±0.50	REV: A0	UNIT: mm	SCALE: 1:1
		SIZE: A4	PAGE: 1/1