

零件图	成品图	客户图
		○




REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	Songjun	2017-09-09

Technical Data

Material:
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: See the table, UL94 V-0

Electrical:
 Rating current: 1Amps/contact max.
 Rating voltage : 250 V AC/DC
 Contact resistance: $\leq 20\text{m}\Omega$ /contact
 Insulation resistance: $\geq 500\text{M}\Omega$
 Withstanding Voltage: 300V AC/minute

Mechanical:
 Operating temperatures: Gold Plated: -55°C to $+105^{\circ}\text{C}$
 Tin plated: -40°C to $+105^{\circ}\text{C}$
 Soldering temperature: $+260^{\circ}\text{C}$, 10S max (PA6T/PA9T/LCP)

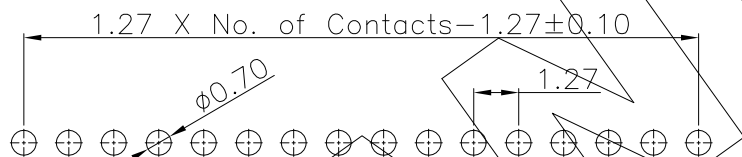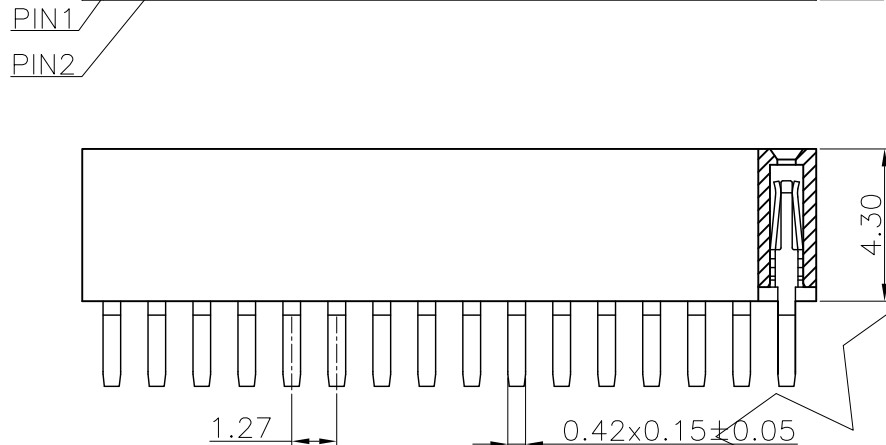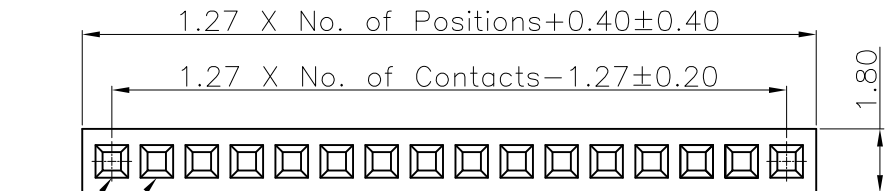

Recommended P.C.B Layout
 General Tolerance ± 0.05

F136	11	XXX	XX	D	X	X	N	X	00
Product Descriptions F136 H=4.30	Product Type 11 Single Row	No. of Positions XXX Poles	Pin Plating G0 GOLD FLASH G1 1U" AU G6 AU10U" S1 SN+AU1U" S7 SN+AU15U" S8 SN+AU30U" T3 MATTE SN	Angle options D Straight	Insulator Material C PA6T D LCP F PA9T	Color B Black W White		Series NO. A OC=2.40mm B OC=3.00mm C OC=3.20mm D OC=2.80mm	

ANYCONN®
 www.anyconn.com
 TEL:+86(0)769 8904 9672
 FAX:+86(0)769 8904 9671
 E-MAIL:sales@anyconn.com

东莞市恩康电子科技有限公司

DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE	DATE : 2017-09-09	TITLE: PH1.27 H4.30 Single Row Straight Female Header
ANGLE $\pm 5^{\circ}$	DRAWN : Songjun	PART NO: F13611XXXXDXXNA00
X.XXX ± 0.15	CHECKED :	
X.XX ± 0.25	APPROVED :	
X.X ± 0.40	PROJECTON	REV: A0
X. ± 0.50		UNIT: mm
		SCALE: 1:1
		SIZE: A4
		PAGE: 1/1