
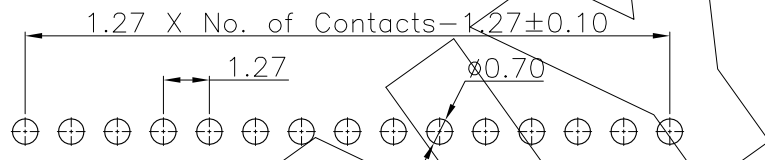
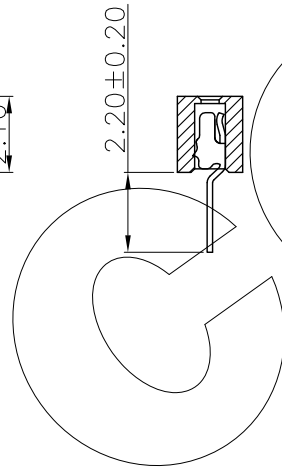
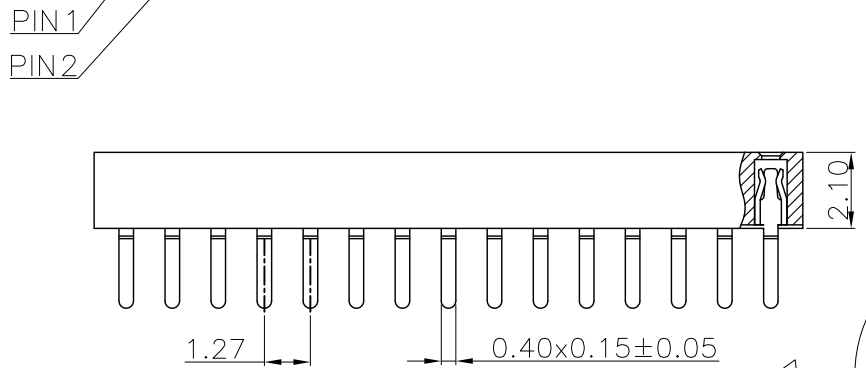


零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	Songjun	2015-05-21

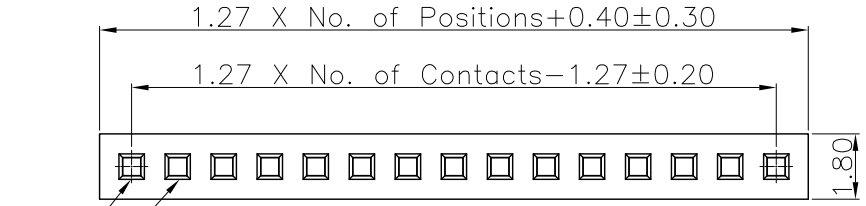

Recommended P.C.B. Layout  
General Tolerance ±0.05

### Technical Data

Material:  
Contact Material: Phosphor Bronze  
Contact plating: Au or Sn Over Ni  
Insulator Material: See the table, UL94 V-0

Electrical:  
Rating current: 1Amps/contact max.  
Rating voltage : 250 V AC/DC  
Contact resistance: ≤20mΩ/contact  
Insulation resistance: ≥1000MΩ  
Withstanding Voltage: 300V AC/minute

Mechanical:  
Operating temperatures: Gold Plated: -55°C to +105°C  
Tin plated: -40°C to +105°C  
Soldering temperature: +260°C, 10S max (PA6T/PA9T)

F113	11	XXX	XX	D	X	X	N	A	00
Product Descriptions F113 H=2.10	Product Type 11 Single Row	No. of Positions XXX Poles	Pin Plating G0 GOLD FLASH G1 1U" AU G6 AU10U" T3 MATTE SN	Angle options D Straight	Insulator Material C PA6T F PA9T	Color B Black W White		Series NO. A OC=2.20mm	

**ANYCONN®** 东莞市恩康电子科技有限公司  
 www.anyconn.com  
 TEL:+86(0)769 8904 9672  
 FAX:+86(0)769 8904 9671  
 E-MAIL:sales@anyconn.com  
**DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD**

TOLERANCE	DATE :	2015-05-21	TITLE:
ANGLE ±5°	DRAWN :	Songjun	Pitch 1.27 H2.1 W1.8 Female Header Straight Single Row Series
X.XXX ±0.15	CHECKED :		PART NO: F11311XXXXDXXXNA00
X.XX ±0.25	APPROVED :		
X.X ±0.40	PROJECTON		REV: A0
X. ±0.50			UNIT: mm
			SCALE: 1:1
			SIZE: A4
			PAGE: 1/1