

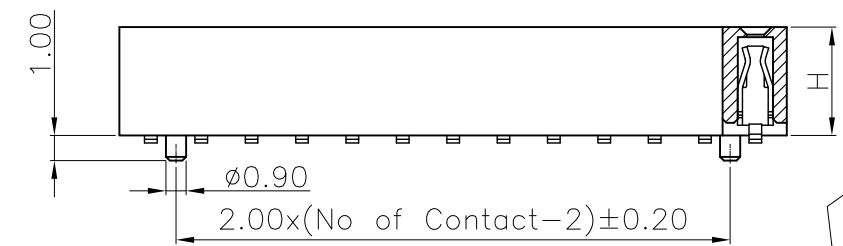


零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	JIN	2020-09-09

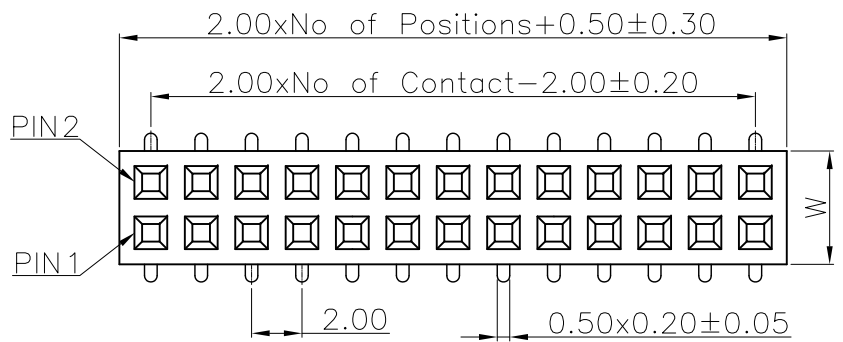


Technical Data

Material:
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: See the table, UL94 V-0

Electrical:
 Rating current: 1.5Amps/contact max.
 Rating voltage : 250 V AC/DC
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ
 Withstanding Voltage: 450V AC/minute

Mechanical:
 Operating temperatures: Gold Plated: -55°C to +105°C
 Tin plated: -40°C to +105°C
 Soldering temperature: +260°C, 10S max (PA6T/PA9T/LCP)

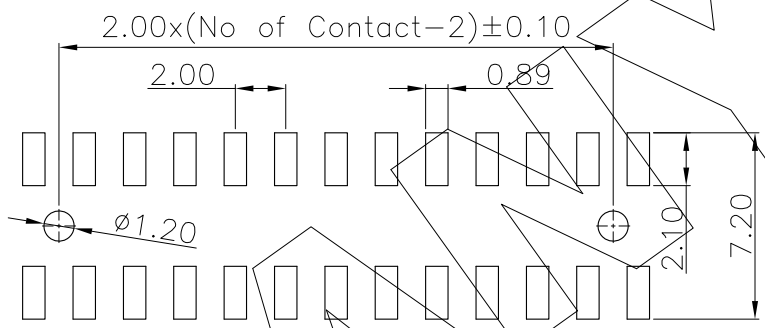

Recommended P.C.B Layout
 General Tolerance ±0.05

Part No.	W	H	H1	OE
F12212 A series of	4.00	4.30	4.60	A 6.20 B 6.40
F12312 A series of	4.50	4.30	4.60	
F12612 A series of	4.00	4.60	4.90	
F12712 A series of	4.50	4.60	4.90	
F13712 A series of	4.00	4.00	4.30	
F13812 A series of	4.50	4.00	4.30	

FXXX	12	XXX	XX	S	X	X	X	X	00
Product Descriptions FXXX H=4.0/4.3/4.6 W=4.00/4.50	Product Type 12 Dual Row	No. of Positions XXX Poles	Pin Plating G0 GOLD FLASH G1 1U" AU G6 AU10U" S1 SN+AU15U" S7 SN+AU15U" S8 SN+AU30U" T3 MATTE SN	Angle options S SMT	Insulator Material C PA6T+G/F30% A PBT+G/F30% D LCP+G/F30%	Color B Black W White	N Without Peg W With Peg	Series NO. A OC=6.20 B OC=6.40	

ANYCONN® 东莞市恩康电子科技有限公司
 www.anyconn.com
 TEL:+86(0)769 8904 9672
 FAX:+86(0)769 8904 9671
 E-MAIL:sales@anyconn.com
DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE	DATE :	2017-02-07	TITLE:
ANGLE ±5°	DRAWN :	Songjun	Pitch2.0 H4.0/4.3/4.6mm Female Header Straight Dual Row Series
X.XXX ±0.15	CHECKED :		FXXX12XXXXXXSXXX00
X.XX ±0.25	APPROVED :		
X.X ±0.40	PROJECTON		
X. ±0.50	REV: A0	UNIT: mm	SCALE: 1:1
	SIZE: A4	PAGE: 1/1	