


零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	JIN	2020-09-09

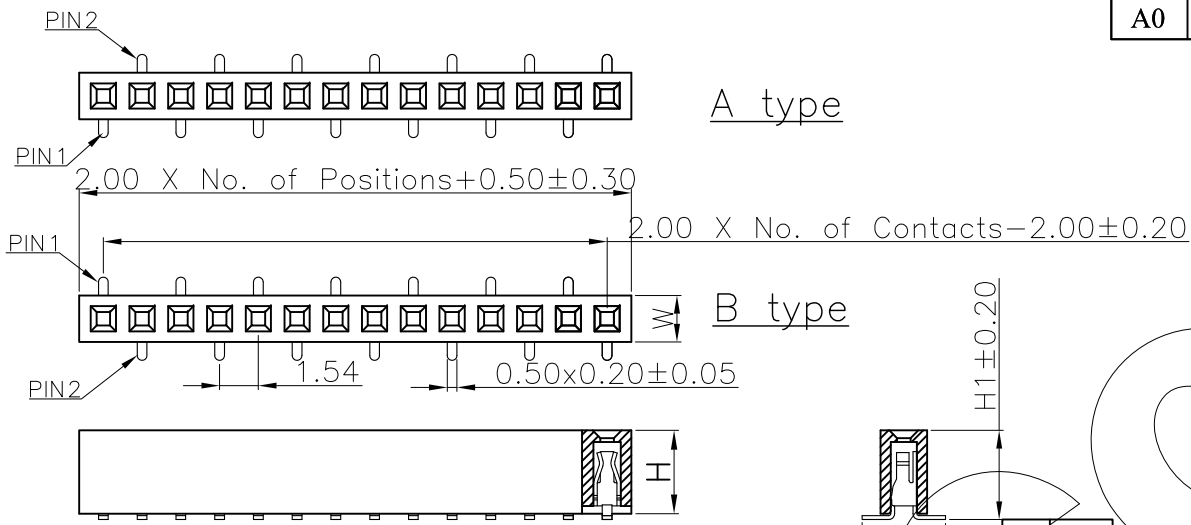


Technical Data

Material:
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: See the table, UL94 V-0

Electrical:
 Rating current: 1.5Amps/contact max.
 Rating voltage : 250 V AC/DC
 Contact resistance: ≤ 20mΩ/contact
 Insulation resistance: ≥ 1000MΩ
 Withstanding Voltage: 450V AC/minute

Mechanical:
 Operating temperatures: Gold Plated: -55°C to +105°C
 Tin plated: -40°C to +105°C
 Soldering temperature: +260°C, 10S max (PA6T/PA9T/LCP)

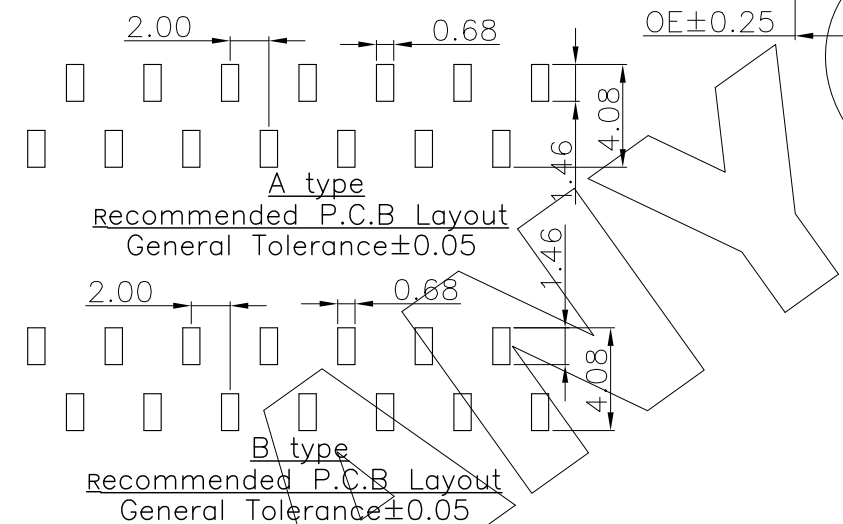

Part No.	W	H	H1	OE
F12211 A series of	2.40	4.30	4.60	A 4.10 B 4.30
F12311 A series of	2.60	4.30	4.60	
F12611 A series of	2.40	4.60	4.90	A 4.10 B 4.30
F13711 A series of	2.40	4.00	4.30	

FXXX	11	XXX	XX	X	X	X	N	X	00
Product Descriptions FXXX H=4.0/4.3/4.6 W=4.00/4.50	Product Type 11 Single row	No. of Positions XXX Poles	Pin Plating G0 GOLD FLASH G1 1U* AU G6 AU10U* S1 SN+AU11U* S7 SN+AU15U* S8 SN+AU30U* T3 MATTE SN	Angle options A A Type B B Type	Insulator Material C PA6T+G/F30% A PBT+G/F30% D LCP+G/F30%	Color B Black W White	N Without Peg	Series NO. A OE=4.10 B OE=4.30	

ANYCONN® 东莞市恩康电子科技有限公司
 www.anyconn.com
 TEL:+86(0)769 8904 9672
 FAX:+86(0)769 8904 9671
 E-MAIL:sales@anyconn.com
DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE	DATE : 2017-02-07	TITLE: Pitch2.0 H4.0/4.3/4.6mm Single Row SMT Female Header
ANGLE ±5°	DRAWN : Songjun	FXXX11XXXXXXXXXXN00
X.XXX ±0.15	CHECKED :	
X.XX ±0.25	APPROVED :	
X.X ±0.40	PROJECTON	REV: A0
X. ±0.50		UNIT: mm
		SCALE: 1:1
		SIZE: A4
		PAGE: 1/1