

零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	JIN	2020-09-09




Technical Data

Material:
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: See the table, UL94 V-0

Electrical:
 Rating current: 1.5Amps/contact max.
 Rating voltage : 250 V AC/DC
 Contact resistance: $\leq 20m\Omega$ /contact
 Insulation resistance: $\geq 1000M\Omega$
 Withstanding Voltage: 450V AC/minute

Mechanical:
 Operating temperatures: Gold Plated: $-55^{\circ}C$ to $+105^{\circ}C$
 Tin plated: $-40^{\circ}C$ to $+105^{\circ}C$
 Soldering temperature: $+260^{\circ}C$, 10S max (PA6T/PA9T/LCP)

Part No.	W	H	OC
F12211 A series of	2.40	4.30	A 2.80 B 2.40 C 1.70 D 1.90
F12311 A series of	2.60	4.30	
F12611 A series of	2.40	4.60	
F12711 A series of	2.60	4.60	
F13711 A series of	2.40	4.00	
F13811 A series of	2.60	4.00	

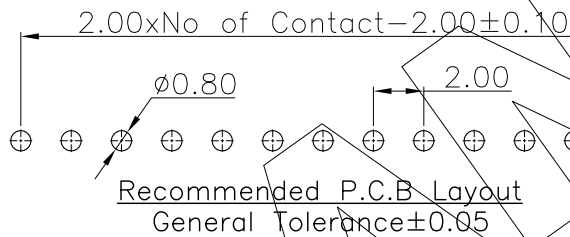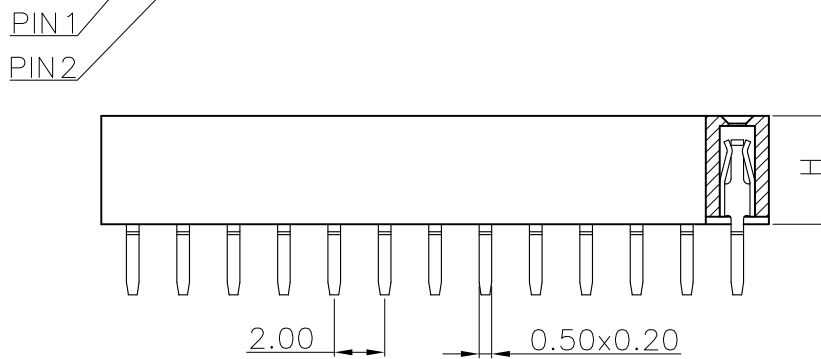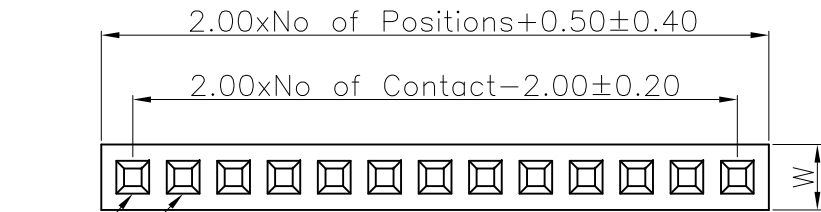

FXXX	11	XXX	XX	D	X	X	N	X	00
Product Descriptions FXXX H=4.0/4.3/4.6 W=2.40/2.60	Product Type 11 Single row	No. of Positions XXX Poles	Pin Plating G0 GOLD FLASH G1 1U" AU G6 AU10U" S1 SN+AU11U" S7 SN+AU15U" S8 SN+AU30U" T3 MATTE SN	Angle options D Straight	Insulator Material C PA6T+G/F30% A PBT+G/F30% D LCP+G/F30%	Color B Black W White	N Without Peg	Series NO. A OC=2.80 B OC=2.40 C OC=1.70 D OC=1.90	

ANYCONN®
 www.anyconn.com
 TEL:+86(0)769 8904 9672
 FAX:+86(0)769 8904 9671
 E-MAIL:sales@anyconn.com

东莞市恩康电子科技有限公司
DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE	DATE :	2017-02-07	TITLE:	
ANGLE $\pm 5^{\circ}$	DRAWN :	Songjun	Pitch2.0 H4.0/4.3/4.6mm Female Header Straight Single Row Series	
X.XXX ± 0.15	CHECKED :		FXXX11XXXXDXXXN00	
X.XX ± 0.25	APPROVED :			
X.X ± 0.40	PROJECTON		REV: A0	UNIT: mm
X. ± 0.50			SCALE: 1:1	SIZE: A4
			PAGE: 1/1	