

零件图	成品图	客户图
		○

REVISION DATA





REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	Songjun	2018-03-21

Technical Data

Material:  
 Contact Material: Copper alloy  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: See the table, UL94 V-0

Electrical:  
 Rating current: 7Amps/contact max.  
 Rating voltage : 250 V AC/DC  
 Contact resistance:  $\leq 20m\Omega$ /contact  
 Insulation resistance:  $\geq 1000M\Omega$   
 Withstanding Voltage: 800V AC/minute

Mechanical:  
 Operating temperatures: Gold Plated:  $-55^{\circ}C$  to  $+105^{\circ}C$   
 Tin plated:  $-40^{\circ}C$  to  $+105^{\circ}C$   
 Soldering temperature:  $+260^{\circ}C, 10S$  max (PA6T/PA9T/LCP)  
 $+220^{\circ}C, 10S$  max (PBT).

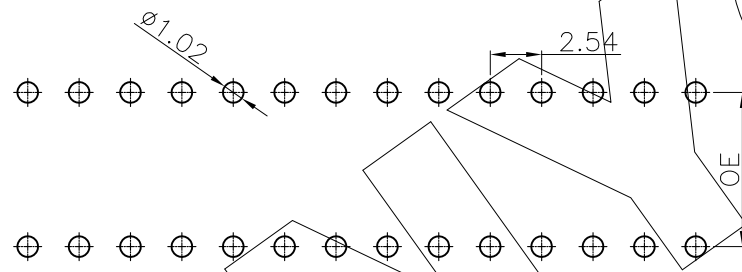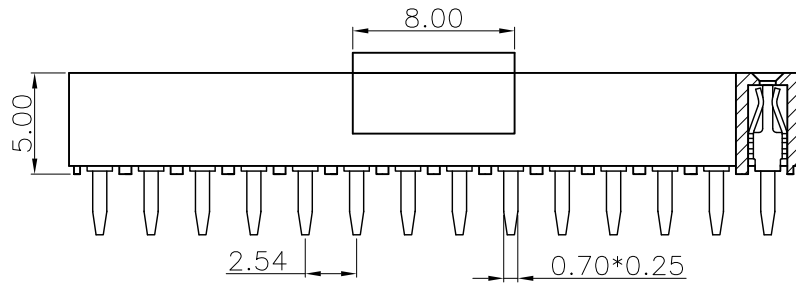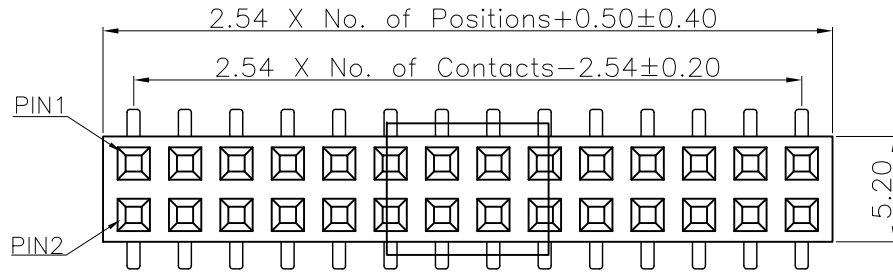

Recommended P.C.B Layout  
 General Tolerance  $\pm 0.05$

<b>F128</b>	<b>12</b>	<b>XXX</b>	<b>XX</b>	<b>U</b>	<b>X</b>	<b>B</b>	<b>N</b>	<b>X</b>	<b>00</b>
Product Descriptions F128 H=5.0	Product Type 12 Dual row	No. of Positions XXX Poles	Pin Plating G1 Gold 1u" SN Tin Plated	Angle options U U型弯角	Insulator Material A PBT B PA66 C PA6T D LCP	Color B Black W White L Blue G Green Y Yellow R Red N Natural		Series NO. B OC=3.00mm OE=5.08mm D OC=3.00mm OE=7.62mm	

**ANYCONN®**  
 www.anyconn.com  
 TEL:+86(0)769 8904 9672  
 FAX:+86(0)769 8904 9671  
 E-MAIL:sales@anyconn.com

东莞市恩康电子科技有限公司

**DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD**

TOLERANCE	DATE :	TITLE:
ANGLE $\pm 5^{\circ}$	DRAWN :	PH2.54 H5.0mm Dual Row SMT Female Header
X.XXX $\pm 0.15$	CHECKED :	PART NO:F12812XXXXXUXBNX00
X.XX $\pm 0.25$	APPROVED :	
X.X $\pm 0.40$	PROJECTON	REV: A0
X. $\pm 0.50$		UNIT: mm
		SCALE: 1:1
		SIZE: A4
		PAGE: 1/1