



零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	Songjun	2018-03-21


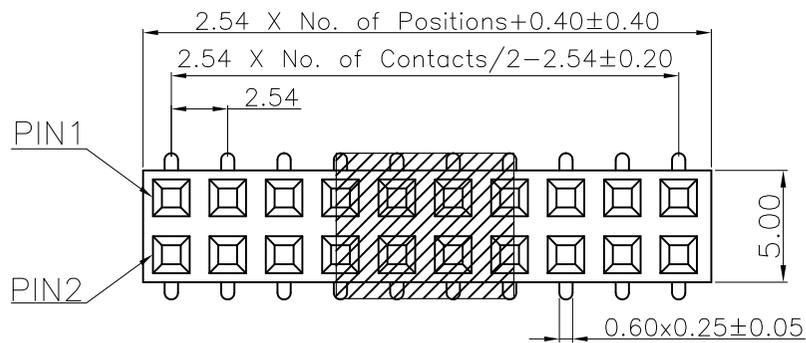


Technical Data

Material:
 Contact Material: Copper alloy
 Contact plating: Au or Sn Over Ni
 Insulator Material: See the table, UL94 V-0

Electrical:
 Rating current: 3Amps/contact max.
 Rating voltage : 250 V AC/DC
 Contact resistance: ≤ 20mΩ/contact
 Insulation resistance: ≥ 1000MΩ
 Withstanding Voltage: 1000V AC/minute

Mechanical:
 Operating temperatures: Gold Plated: -55°C to +105°C
 Tin plated: -40°C to +105°C
 Soldering temperature: +260°C, 10S max (PA6T/PA9T/LCP)

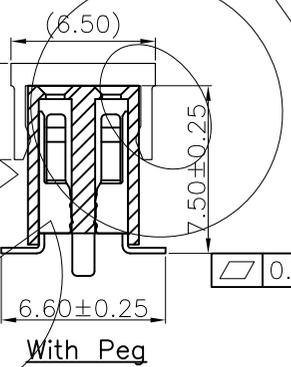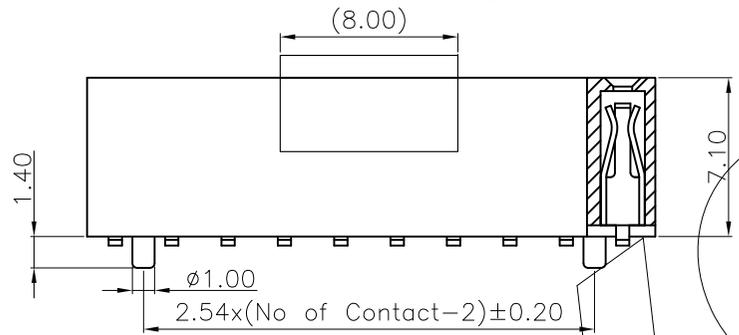


C



C

B

B

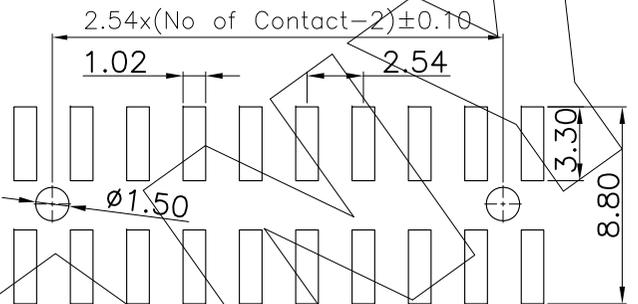

Recommended P.C.B Layout
 General Tolerance ± 0.05

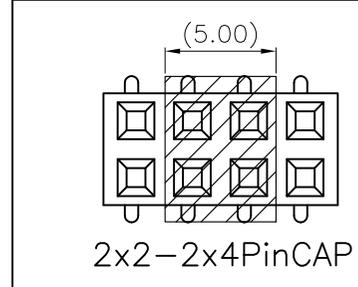

F132	12	XXX	XX	X	X	X	W	A	0X
Product Descriptions F132 H=7.1	Product Type 12 Single Row	No. of Positions XXX Poles	Pin Plating G0 GOLD FLASH G1 1U* AU G6 AU10U* S1 SN+AU1U* S7 SN+AU15U* S8 SN+AU30U* T3 MATTE SN	Angle options A A Type B B Type	Insulator Material C PA6T D LCP F PA9T	Color B Black W White		Series NO. A OE=6.60mm	

ANYCONN® 东莞市恩康电子科技有限公司
 www.anyconn.com
 TEL:+86(0)769 8904 9672
 FAX:+86(0)769 8904 9671
 E-MAIL:sales@anyconn.com
DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE	DATE : 2018-03-21	TITLE:
ANGLE ±5°	DRAWN : Songjun	PH2.54 H7.10mm Single Row SMT Female Header
X.XXX ±0.15	CHECKED :	PART NO: F13212XXXXXXXXXWA0X
X.XX ±0.25	APPROVED :	
X.X ±0.40	PROJECTON	
X. ±0.50		REV: A0 UNIT: mm SCALE: 1:1 SIZE: A4 PAGE: 1/1

A

A

4

3

2

1