
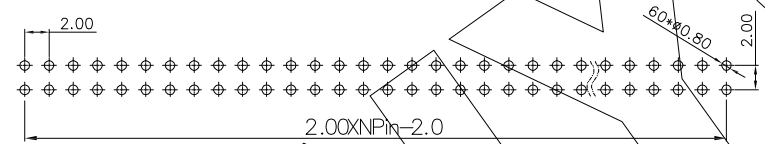

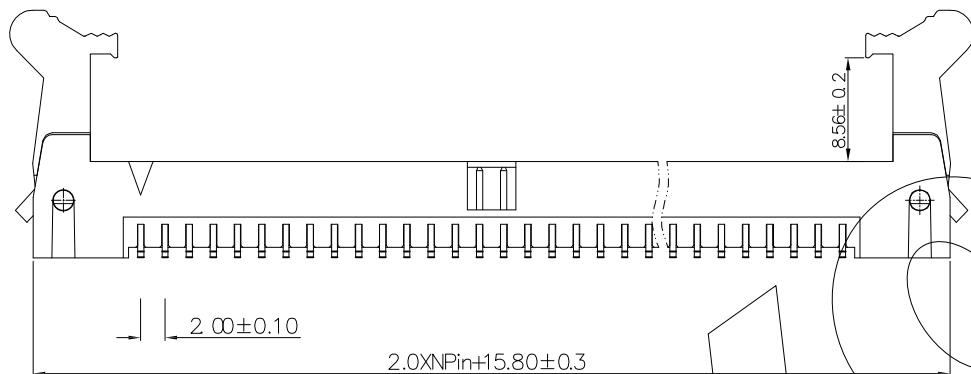


零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	JIN	2020-07-28

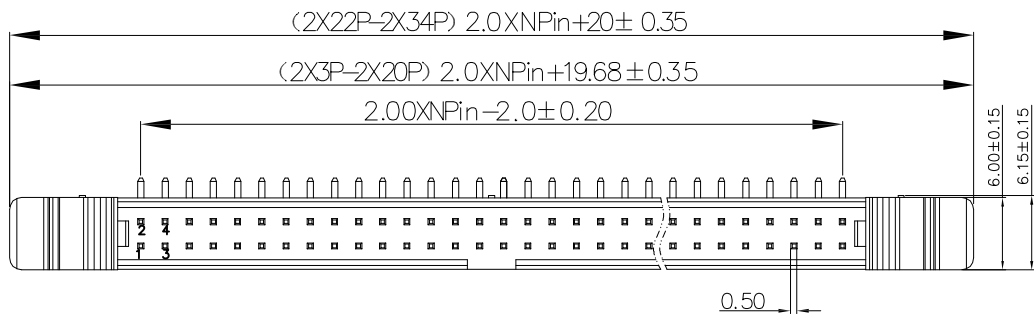

Recommended P.C.B Layout  
General Tolerance±0.05

### Technical Data

Material:  
Contact Material: Copper Alloy  
Contact plating: Au or Sn Over Ni  
Insulator Material: See the table, UL94 V-0

Electrical:  
Rating current: 1.5Amps/contact max.  
Rating voltage : 100 V AC/DC  
Contact resistance: ≤20mΩ/contact  
Insulation resistance: ≥800MΩ  
Withstanding Voltage: 400V AC/minute

Mechanical:  
Operating temperatures: Gold Plated: -55°C to +105°C  
Tin plated: -40°C to +105°C  
Soldering temperature: +260°C, max(PA9T)

BHJ	XXX	12	R	XX	C	X	N	RXXX
HOUSING TYPE J PH2,00 H10,2	PIN No. No. of Positions XXX Positions	PRODUCT TYPE 12 Dual Row Single Base	ANGLE OPTIONS R 90° D 180° S SMT	PIN PLATING G0 Gold Flash G1 1u" Au G6 Au10u" S1 Sn+Au1u" S7 Sn+Au15u" S8 Sn+Au30u" T3 Matte Sn	INSULATOR MATERIAL C PA6T+30%GF	COLOR B BLACK W WHITE L BLUE G GREEN Y YELLOW R RED N NATURAL		PIN LENGTH L=XXXXmm

**ANYCONN®** 东莞市恩康电子科技有限公司  
www.anyconn.com  
TEL:+86(0)769 8904 9672  
FAX:+86(0)769 8904 9671  
E-MAIL:sales@anyconn.com

**DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD**

TOLERANCE	DATE :	2020-07-28	TITLE:	2.0mm Pitch Double Row Right Angle Ejector Header	
ANGLE ±5°	DRAWN :	JIN	PART NO: BHJXXX12RXXXXRXXX		
X.XXX ±0.15	CHECKED :				
X.XX ±0.25	APPROVED :				
X.X ±0.40	PROJECTON		REV: A0	UNIT: mm	SCALE: 1:1
X. ±0.50			SIZE: A4	PAGE: 1/1	