





零件图 成品图 客户图

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	Songjun	2020-09-28



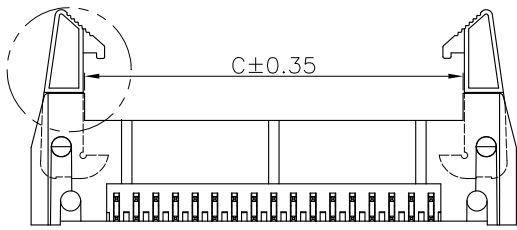


### Technical Data


Material:  
 Contact Material: Copper Alloy  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: See the table, UL94 V-0

Electrical:  
 Rating current: 1.5Amps/contact max.  
 Rating voltage : 100 V AC/DC  
 Contact resistance: ≤20mΩ/contact  
 Insulation resistance: ≥800MΩ  
 Withstanding Voltage: 400V AC/minute

Mechanical:  
 Operating temperatures: Gold Plated: -55°C to +105°C  
 Tin plated: -40°C to +105°C  
 Soldering temperature: +260°C, max(PA9T)

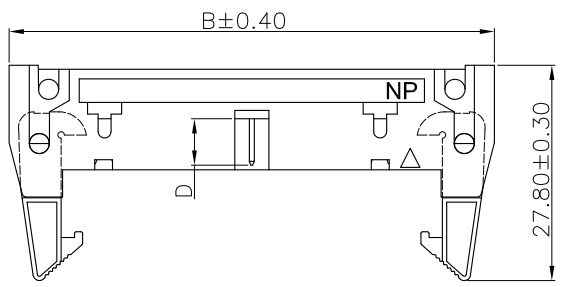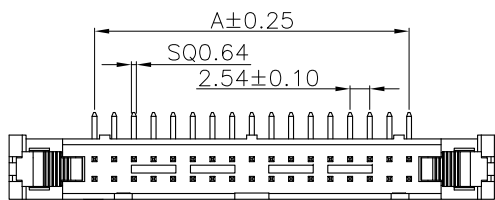

No. of Contacts	DIMENSIONS		
	A	B	C
6	5.08	26.92	13.08
8	7.62	29.36	15.62
10	10.16	32.00	18.16
14	15.24	37.08	23.24
16	17.78	39.62	25.78
20	22.86	44.70	30.86
26	30.48	52.32	38.48
30	35.56	57.40	43.56
34	40.64	62.48	48.64
40	48.26	70.10	56.26
50	60.96	82.80	68.96
60	73.66	95.50	81.66
64	78.74	100.60	86.74



Recommended P.C.B Layout  
 General Tolerance ±0.05

<b>BHB</b>	<b>XXX</b>	<b>12</b>	<b>R</b>	<b>XX</b>	<b>F</b>	<b>X</b>	<b>N</b>	<b>RXXX</b>
HOUSING TYPE B PH2.54 H17.0	PIN No. No. of Positions XXX Positions	PRODUCT TYPE 12 Dual Row Single Base	ANGLE OPTIONS R 90° D 180° S SMT	PIN PLATING G0 Gold Flash G1 1u" Au G6 Au10u" S1 Sn+Au1u" S7 Sn+Au15u" S8 Sn+Au30u" T3 Matte Sn	INSULATOR MATERIAL F PA9T+30%GF	COLOR B BLACK W WHITE L BLUE G GREEN Y YELLOW R RED N NATURAL		PIN LENGTH L=XXXXmm

**ANYCONN®** 东莞市恩康电子科技有限公司  
 www.anyconn.com  
 TEL:+86(0)769 8904 9672  
 FAX:+86(0)769 8904 9671  
 E-MAIL:sales@anyconn.com  
**DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD**

TOLERANCE	DATE : 2020-09-28	TITLE:			
ANGLE ±5°	DRAWN : Songjun	PH2.54 Double Row Right Angle Ejector Header			
X.XXX ±0.15	CHECKED :	PART NO: BHBXXX12RXXFXNRXXX			
X.XX ±0.25	APPROVED :				
X.X ±0.40	PROJECTON				
X. ±0.50	REV: A0	UNIT: mm	SCALE: 1:1	SIZE: A4	PAGE: 1/1