







零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	JIN	2020-12-17

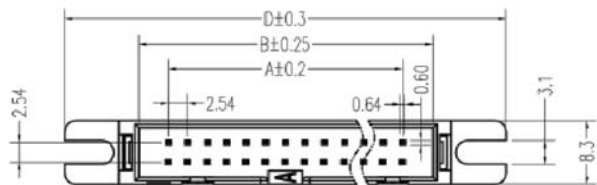

Material:
 Insulator: PBT+30% Glass Fiber (UL94V-0).
 Contact: Copper Alloy.
 Contact Plated: Gold or Tin over Nickel Plated.

Specification:
 Current Rating: 1 Amp.
 Withstanding Voltage: AC 500V for 1 Minute.
 Insulation Resistance: 1000M Min. at DC 500V.
 Contact Resistance: 15m Max.
 Operating Temperature: -40°C ~ +105°C.

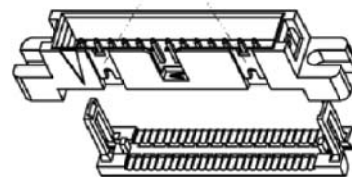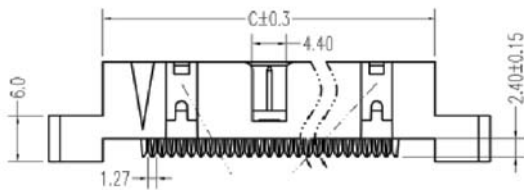

	Dim. A	Dim. B	Dim. C	Dim. D
10	10.16	18.24	22.95	37.32
14	15.24	23.32	28.03	42.40
16	17.78	25.86	30.57	44.94
20	22.86	30.94	35.65	50.02
24	27.94	36.02	40.73	55.10
26	30.48	38.56	43.27	57.64
30	35.56	43.64	48.35	62.72
34	40.64	48.72	53.43	67.80
40	48.26	56.34	61.05	75.42
50	60.96	69.04	73.75	88.12
60	73.66	81.74	86.45	100.82
64	78.74	86.82	91.53	105.90

ENKCOM® 东莞市恩康电子科技有限公司
 www.enkcom.com
 TEL:+86(0)769 8904 9672
 FAX:+86(0)769 8904 9671
 E-MAIL:sales@enkcom.com
DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE	DATE :	2020-12-17	TITLE:	
ANGLE ±5°	DRAWN :	JIN	PH2.54mm IDC	
X.XXX ±0.15	CHECKED :		PART NO:IDCF2XXXDBXXAX02	
X.XX ±0.20	APPROVED :			
X.X ±0.25	PROJECTON		REV: A0	UNIT: mm
X. ±0.35			SCALE: 1:1	SIZE: A4
			PAGE: 1/1	