
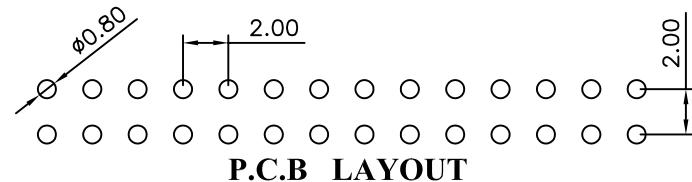
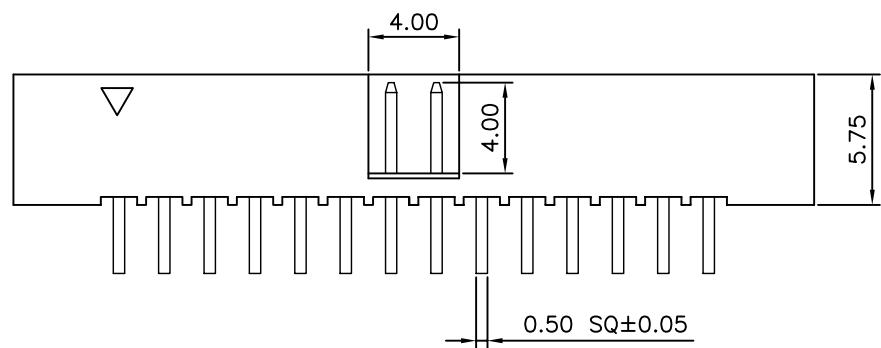


REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2010-11-06

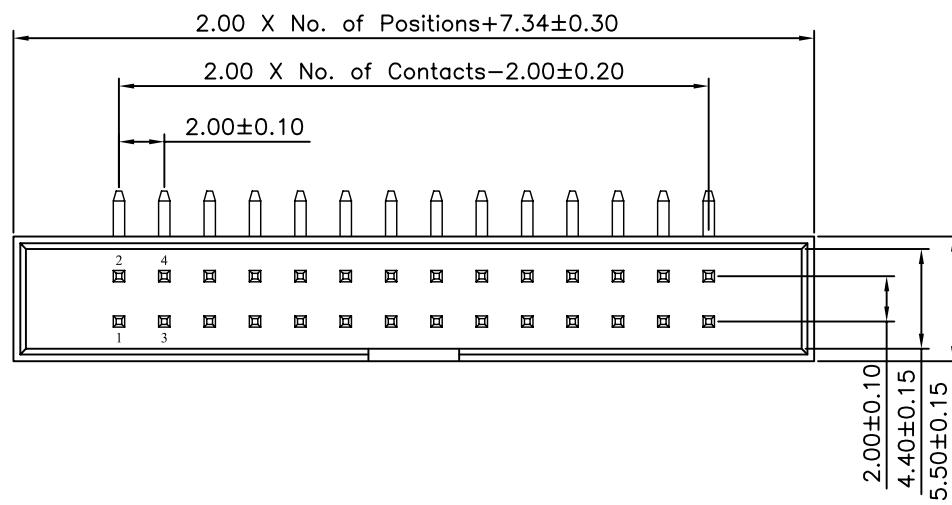

P.C.B LAYOUT

Technical Data

Material:

Contact Material: Brass

Insulator Material: Black Polyester UL94V-0

Standard: PA6T+30%G.F


Electrical:

Current rating: 1.5Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$ Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$

Withstanding Voltage: 450V AC/minute

Mechanical:

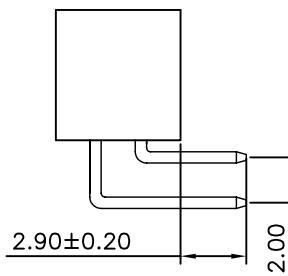Operating temperatures: Gold Plated: -55°C to $+105^{\circ}\text{C}$ Tin plated: -40°C to $+105^{\circ}\text{C}$ Soldering temperature: $+260^{\circ}\text{C}$, 10s max.

ENKCOM® 东莞市恩康电子有限公司
DONGGUAN ENKANG ELECTRONICS CO.,LTD
www.enkcom.com

TOLERANCE	PROJECTON	DATE	TITLE:	
ANGLE $\pm 5^{\circ}$		2010-11-06	2.00mm Pitch Double Row Angle Box Header L9.5/13.5	
X.XXX ± 0.10	DRAWN :	Jason	PART NO: BHCXXX12RG1CBNR001	
X.XX ± 0.20	CHECKED :		DRAWING NO:	
X.X ± 0.30	APPROVED :		REV: A0	UNIT: mm
X. ± 0.50			SCALE: 3:1	SIZE: A4