


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2015-11-09





### SPECIFICATIONS



Current Rating: 3Amps  
 Insulation Resistance: 1000M Min  
 Contact Resistance: 20MΩ Max  
 Withstanding Voltage: AC 500V  
 Operation Temperature: -40 to +105  
 Contact Material: Brass  
 Insulator Material: Polyester (UL 94V-0)  
 Standard: PBT/PA6T  
 Contact Material: Brass  
 Contact Plating: Au or Sn over 30u" Ni





(60.64PIN)  
 三个缺口，两个窗口

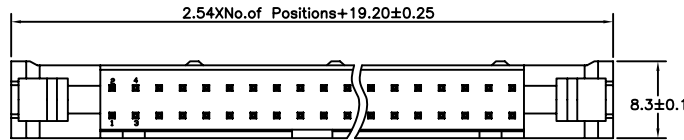

(20.24.26.30  
 34.40.50PIN)  
 一个缺口，两个窗口

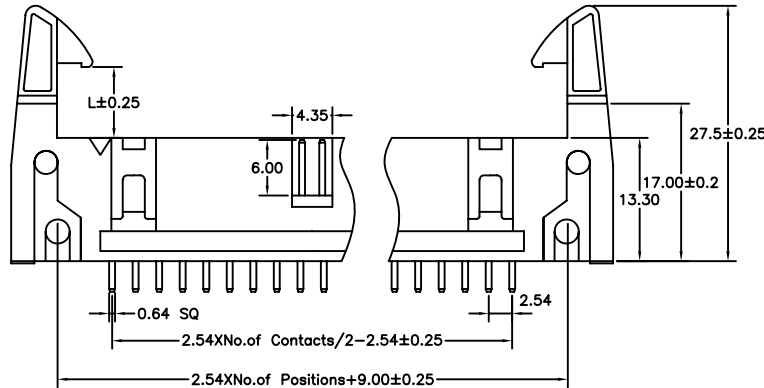

(10 14 16PIN)  
 一个缺口



BHB	XXX	XX	D	XX	X	B	X	D013
Pin位数 No. of Positions XXX Positions	产品型号 11 单塑单排 12 单塑双排	产品折弯类型 D 180°	端子电镀 00 无 G0 0.8u"Au G1 1u"Au SN Tin Plated S1 1u" Gold/Tin S2 2u" Gold/Tin G7 Au15u" G8 Au30u"	材质 A PBT C PA-6T D LCP	颜色 B 黑色	产品特征 L Long Latch S Short Latch	流水码	

**ENKCOM** 东莞市恩康电子有限公司  
 www.enkcom.com **DONGGUAN ENKANG ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON		TITLE:
ANGLE ±5°	DATE :	2015-11-09	PH2.54mm 勾勾牛角
X.XXX ±0.10	DRAWN :	Songjun	PART NO: BHBXXXXDXDXBXD013
X.XX ±0.20	CHECKED :		DRAWING NO:
X.X ±0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50			