
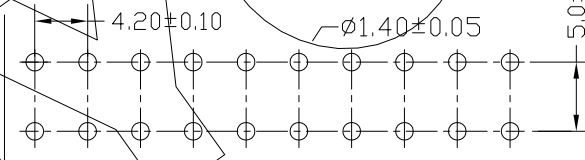

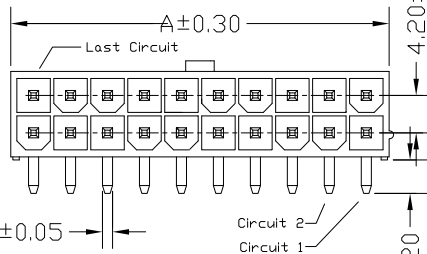



零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	Zhang	2017-06-12

Poles	Dimensions(mm)	
	A	B
02	5.60	--
04	9.80	4.20
06	14.00	8.40
08	18.20	12.60
10	22.40	16.80
12	26.60	21.00
14	30.80	25.20
16	35.00	29.40
18	39.20	33.60
20	43.40	37.80
22	47.60	42.00
24	51.80	46.20

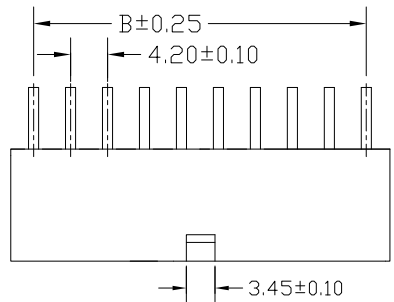

**P.C.B.HOLE DIMENSION**

**Technical Data**

Material:  
 Contact Material: Copper Alloy  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: See the table, UL94 V-0

Electrical:  
 Rating current: 9Amps/contact max.  
 Rating voltage : 600 V AC/DC  
 Contact resistance: ≤20mΩ/contact  
 Insulation resistance: ≥1000MΩ  
 Withstanding Voltage: 1500V AC/minute

Mechanical:  
 Operating temperatures: Gold Plated: -55°C to +105°C  
 Tin plated: -40°C to +105°C  
 Soldering temperature: +260°C, max(PA66)  
 +220°C, max(PBT)

<b>WF</b>	<b>J</b>	<b>R</b>	<b>XXX</b>	<b>XX</b>	<b>X</b>	<b>N</b>	<b>R003</b>
	Pitch(mm) J 4.20mm	Angel Options R 90°	No. of Positions XXX Poles	Pin Plating G0 Gold Flash SN Tin Plated	Insulator Material A PBT B PA66 C PA6T D LCP E PA46 F PA9T		Series NO. OC=3.6mm

**ANYCONN®** 东莞市恩康电子科技有限公司  
 www.anyconn.com  
 TEL:+86(0)769 8904 9672  
 FAX:+86(0)769 8904 9671  
 E-MAIL:sales@anyconn.com  
**DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD**

TOLERANCE	DATE :	2017-06-12	TITLE:	PH4.20 H12.85 W9.7 90° DIP WAFER				
ANGLE ±5°	DRAWN :	Zhang	PART NO: WFJRXXXXXXXXNR003	REV:	UNIT:	SCALE:	SIZE:	PAGE:
X.XXX ±0.15	CHECKED :			A0	mm	1:1	A4	1/1
X.XX ±0.25	APPROVED :							
X.X ±0.40	PROJECTON							
X. ±0.50								