零件图	成品图	客户图
		○

REVISION DATA

REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	Songjun	2020-10-17

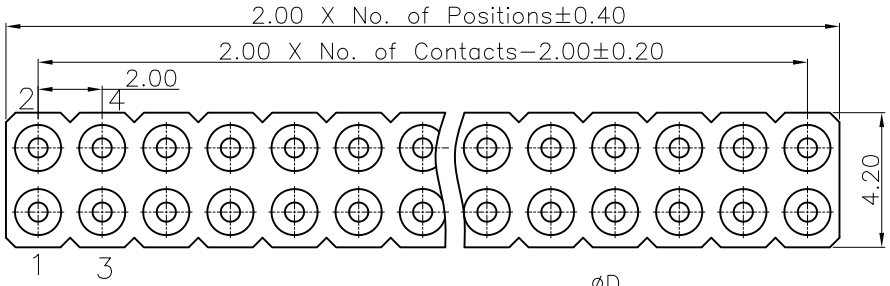

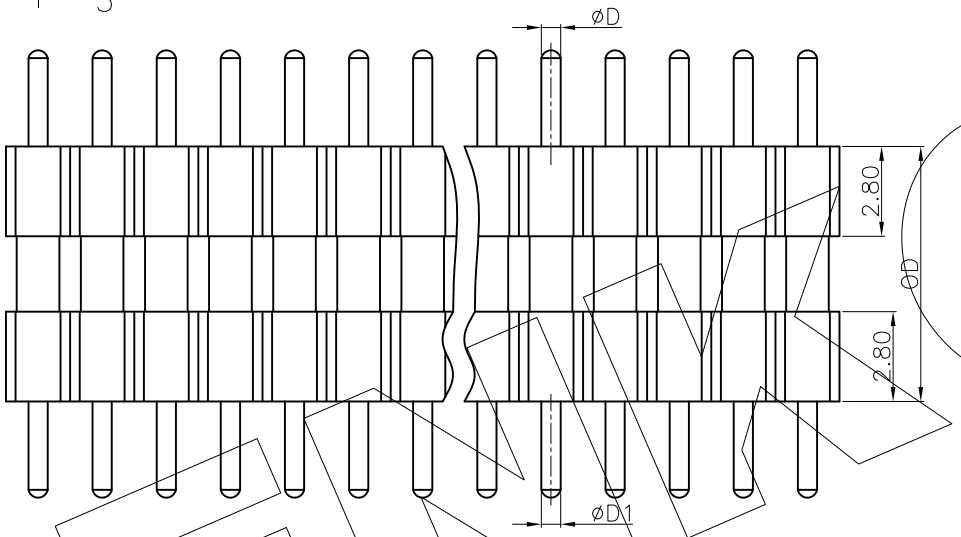

Technical Data

Material:
Pin: Brass
Plating:Au or Sn
Insulator black(housing): PPS
Electrical:
Current rating: 2Amps/contact max.
Contact resistance: ≤4mΩ/contact
Insulation resistance: ≥1000MΩ
Operaing voltage: 60VAC/DC
Mechanical:
Operaing temperatures: Gold Plated:−55°C to+105°C
Tin plated:−40°C to+105°C
Soldering temperature: +260°C,10s max

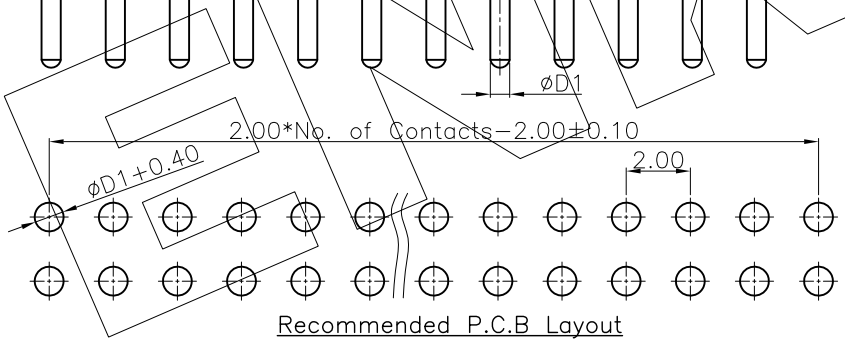

Recommended P.C.B Layout
General Tolerance±0.05

	OA	OC	D	D1	OD	L
DIM.	2.50	2.00	0.46	0.46	6.00	10.50
	3.00	2.50	0.55	0.55	8.50	14.00
	3.50	2.80	0.66	0.66	9.00	15.30
Dim OA&OC&D&D1&OD& can be customized by customers						

PC

D	XXX	A	6	F	X	00	XXXXX	0	00
Angel Options	No. of Positions	Dip Spacing	Insulator Height	Insulator type	Pin Plated	Clip plated	Pin length(mm)	Insulator Option	Series
D 180° R 90° S SMT H H-SMT	XXX Positions	0 No 1 1.27mm 2 2.54mm 3 7.62mm 4 10.16mm 6 15.24mm 9 22.86mm A 2.00mm S Special	0 No 1 1.20 mm 2 1.90 mm 3 2.00 mm 4 2.10 mm 5 2.20 mm 6 2.80 mm 7 3.00 mm 8 3.80 mm 9 4.10 mm A 4.20 mm B 7.00 mm S Special	E PPS Single Row F PPS Two Row	0 No 1 Tin120u" 2 Tin200u" 3 Gold0.4u" 4 Gold0.8u" 5 Gold1u" 6 Gold1.5u" 7 Gold2u" 8 Gold3u" 9 Gold5u" A Gold8u" B Gold10u" C Gold15u" D Gold30u" E Ag plated F Nickel 80u"	00 No A: 1 Tin120u", 2 Tin200u", 3 Gold0.4u", 4 Gold0.8u", 5 Gold1u" B: 6 Gold1.5u", 7 Gold2u", 8 Gold3u" C: 9 Gold5u", A Gold8u" D: B Gold10u", C Gold15u", D Gold30u", E Ag plated, F Nickel 80u"	XXXXX XX.Xmm S Special	0 No	00 No

ENKCOM®
www.enkcom.com
TEL:+86(0)769 8904 9672
FAX:+86(0)769 8904 9671
E-MAIL:sales@anycom.tw

东莞市恩康电子科技有限公司
DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE	
ANGLE	±5°
X.XXX	±0.15
X.XX	±0.25
X.X	±0.38
X.	±0.50

DATE :	2020-10-17	TITLE: PH2.00 IC Sockets Male Dual Row 180° DIP
DRAWN :	Songjun	
CHECKED :		PART NO: PCDXXXA6FX00XXXXX000
APPROVED :		
PROJECTON		

REV:	UNIT:	SCALE:	SIZE:	PAGE
A0	mm	1:1	A4	1/1