零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	ANSEN	2020.08.20

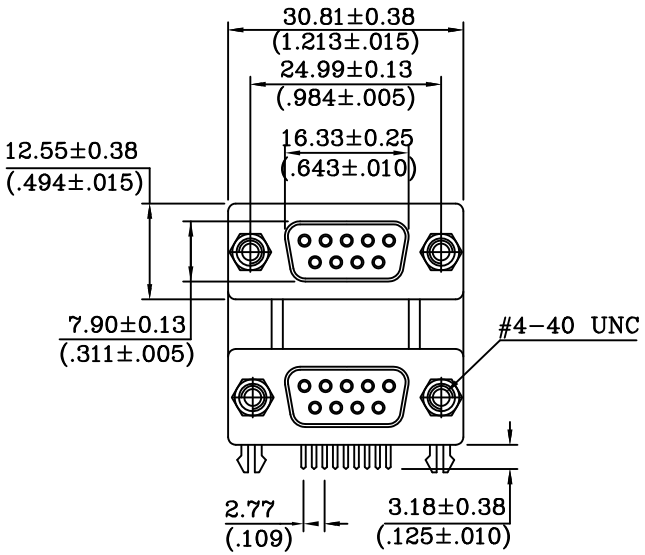

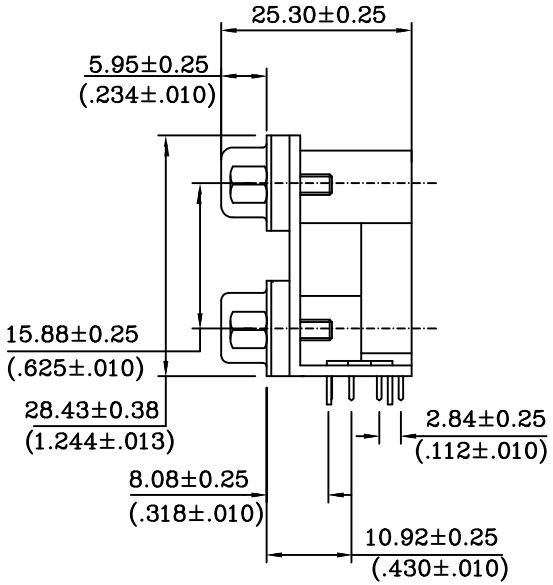

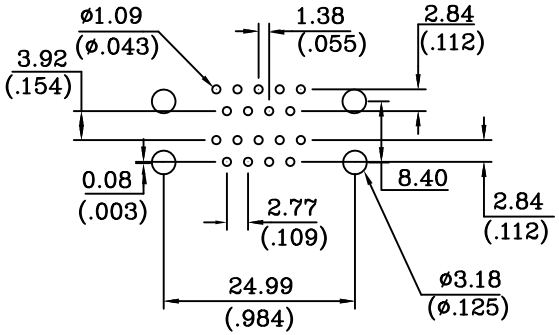

P.C.B LAYOUT

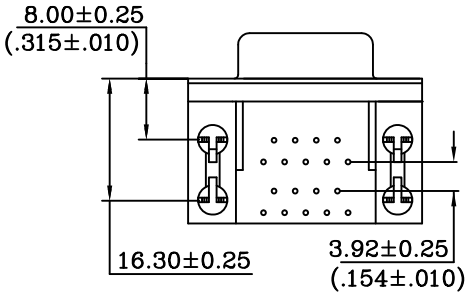

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, NICKEL FINISHED
INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
CONTACT MATERIAL : BRASS
CONTACT FINISH : SELECTIVE GOLD FINISHED
GROUNDING BRACKET : ZINC ALLOY, NICKEL PLATED

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
CONTACT RESISTANCE : 30 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
TEMPERATURE RATING : −55°C ~ +105°C

DS	F	R	018	XX	D	1	W	M
	种类型号 Insulator Type M Male(公) F Female(母)	角度选项 Angel Options D Straight(180°) R RightAngle S 焊接式(180°)	Pin 位数 No. of Positions 18 Positions	电镀 Clip Plated G1:Au1u" S1:半金镍 S9:半金镍30u"	塑胶类型 Insulator Type S 单排 D 双排	塑胶颜色 Insulator Color 1 Black黑色 2 Brown褐色 3 Whlte白色 4 Yellow黄色 5 Bule蓝色	螺丝 N 无螺丝 W 有螺丝	产品流水码 Serles A B C D .

ENKCOM®
www.enkcom.com
TEL:+86(0)769 8904 9672
FAX:+86(0)769 8904 9671
E-MAIL:sales@anycom.tw

东莞市恩康电子科技有限公司
DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE		DATE :	2020.08.20	TITLE: D-SUB 90° FEMALE				
ANGLE	±5°	DRAWN :	ANSEN					
X.XXX	±0.15	CHECKED :		PART NO: DSFR018XXD1WM				
X.XX	±0.25	APPROVED :						
X.X	±0.40							
X.	±0.50	PROJECTON		REV: A0	UNIT: mm	SCALE: 1:1	SIZE: A4	PAGE: 1/1

零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	ANSEN	2020.08.20

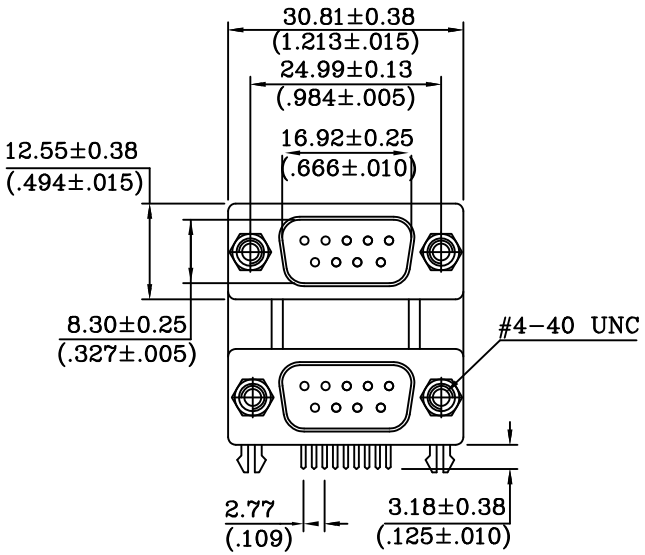

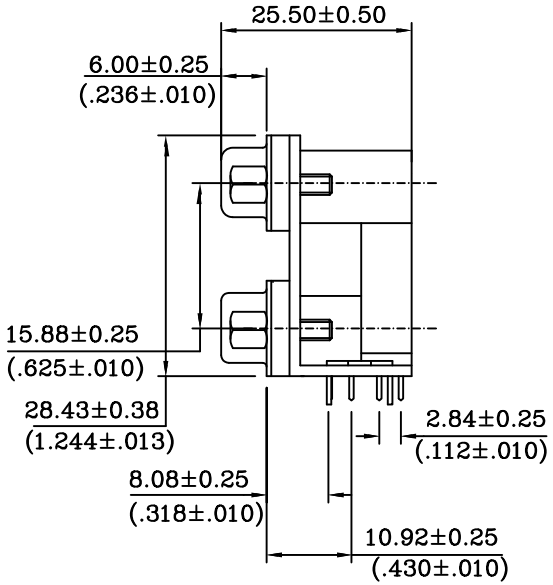

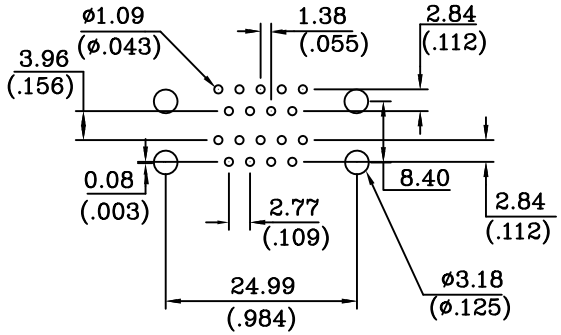

P.C.B LAYOUT

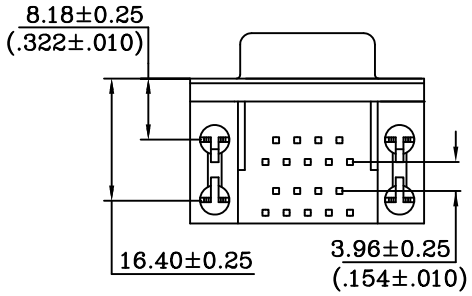

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, NICKEL FINISHED
INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
CONTACT MATERIAL : BRASS
CONTACT FINISH : SELECTIVE GOLD FINISHED
GROUNDING BRACKET : ZINC ALLOY, NICKEL PLATED

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
CONTACT RESISTANCE : 30 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
DURABILITY:100 CYCLES MIN
TEMPERATURE RATING : −55°C ~ +105°C

DS	M	R	018	XX	D	1	W	M
	种类型号 Insulator Type M Male(公) F Female(母)	角度选项 Angel Options D Straight(180°) R RightAngle S 焊接式(180°)	Pin 位数 No. of Positions 18 Positions	电镀 Clip Plated G1:Au1u" S1:半金镀 S9:半金镀30u"	塑胶类型 Insulator Type S 单排 D 双排	塑胶颜色 Insulator Color 1 Black黑色 2 Brown褐色 3 Whlte白色 4 Yellow黄色 5 Bule蓝色	螺丝 N 无螺丝 W 有螺丝	产品流水码 Serles A B C D . . .

ENKCOM®
www.enkcom.com
TEL:+86(0)769 8904 9672
FAX:+86(0)769 8904 9671
E-MAIL:sales@anycom.tw

东莞市恩康电子科技有限公司
DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE		DATE :	2020.08.20	TITLE: D-SUB 90° MALE				
ANGLE	±5°	DRAWN :	ANSEN					
X.XXX	±0.15	CHECKED :		PART NO: DSMR018XXD1WM				
X.XX	±0.25	APPROVED :						
X.X	±0.40							
X.	±0.50	PROJECTON		REV: A0	UNIT: mm	SCALE: 1:1	SIZE: A4	PAGE: 1/1