

4





3

2

1

REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2018-07-12

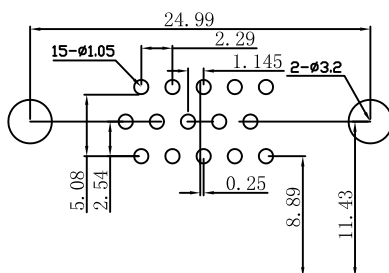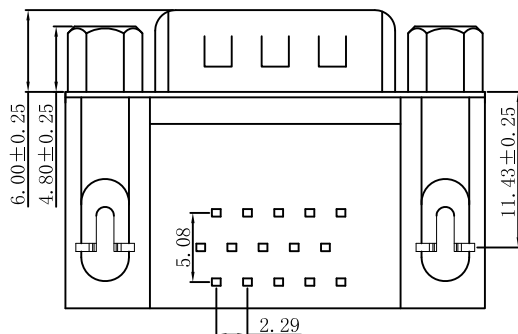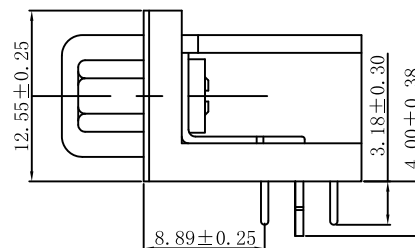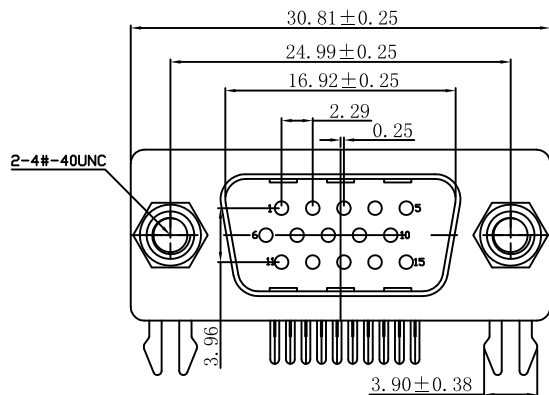

PCB layout

备注:

1. 性能:

额定电压: 250V

额定电流: 3AMP

接触阻抗: 30mΩ MAX.

绝缘阻抗: 1000Ω MIN. at 500V DC

耐电压: 500V Per minute

温度范围: -55° C~105° C

2. 材质:

胶芯: PBT+30% G.F (UL94V-0) 黑色

端子: 黄铜, 镀镍底30u" Min. 接触部镀金0.5u" Min. 焊接部镀亮锡80u" Min.

铁壳: SPCC, 前壳镀铜底50u' 镍80u" Min.

Z 片: SPCC、表面镀锡80u"

铆钉: 黄铜、表面镀镍80u"

螺丝: SPCC、铜底30u" 表面镀镍80u"

DS

M

R

xxx

XX

X

X

W

A

种类型号
Insulator TypeM Male(公)
F Female(母)角度选项
Angel OptionsD Straight(180°)
R RightAngle
S 焊接式(180°)Pin 位数
No. of Positions

xxx Positions

电镀
Clip PlatedG1: Au1u"
S1: 半金锡
S9: 半金锡30u"塑胶类型
Insulator TypeS 单排
D 双排
K 三排塑胶颜色
Insulator Color1 Black黑色
2 Brown褐色
3 White白色
4 Yellow黄色
5 Blue蓝色

螺丝

N 无螺丝
W 有螺丝产品流水码
SeriesA
B
C
D
.
.
.

ENKCOM 东莞市恩康电子有限公司

www.enkcom.com

DONGGUAN ENKANG ELECTRONICS CO.,LTD

TOLERANCE	PROJECTON	TITLE:
ANGLE ±5°	DATE : 2018-07-12	HDR 15M(8.89) 柳合锁螺丝(强压)
X.XXX ±0.10	DRAWN : TIAN	PART NO: DSMRXXXXXXXXWC
X.XX ±0.20	CHECKED :	
X.X ±0.30	APPROVED :	
X. ±0.50		REV: A0 UNIT: mm SCALE: 1:1 SIZE: A4

4

3

2

1