


零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	Harvey Li	2022-09-13

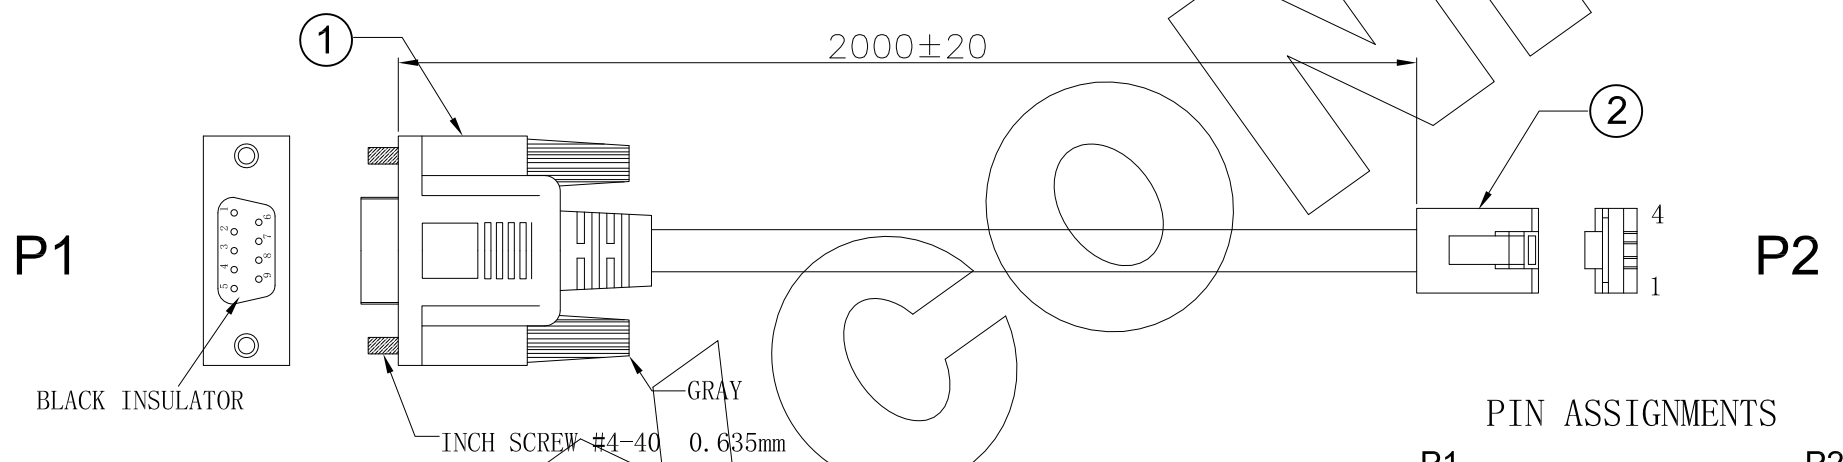

PIN ASSIGNMENTS

P1	P2
5	1
3	3
2	4

- NOTES:
1. OPEN&SHORT 100% TEST
 2. CONDUCTION IMPEDANCE: 3Ω MAX
 3. INSULATION RESISTANCE: $10M\Omega$ MIN
 4. TEST VOLTAGE: 300V DC.
 5. ALL MATERIALS COMPLY WITH "ROHS" ENVIRONMENTAL PROTECTION STANDARD.

NO.	NAME	SPECIFICATION	QTY	UNIT	REMARK
③	CONN	D-SUB 9PIN MALE	1	PC	
②	CONN	RJ10 CONNECTOR 4P4C	1	PC	
①	WIRE	UL2464 26AWG (10/0.12BC)*3C, JACKET PVC GRAY OD:3.20mm	2.10	M	

ANYCONN® 东莞市恩康电子科技有限公司
 www.enkcom.com
 TEL:+86(0)769 8904 9672
 FAX:+86(0)769 8904 9671
 E-MAIL:sales@anyconn.com

DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE	DATE :	2022-09-13	TITLE:	UL2464 26AWG*3C DB9 TO RJ10 GRAY L=2000mm		
ANGLE $\pm 2^\circ$	DRAWN :	Harvey Li	PART NO:EK-QL-066-1			
X.XXX ± 0.03	CHECKED :					
X.XX ± 0.05	APPROVED :					
X.X ± 0.10	PROJECTION		REV:	UNIT:	SCALE:	
X. ± 0.15			A0	mm	N/A	
			SIZE:	A4	PAGE	
					1/1	