

零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	D.Y.Y	2023-03-18

Technical Data

Material:
Terminal: High Performance Copper Alloy(C1100)
Plating:
Contact Area: Selective Plating.
Soldering Area: Gold or 100u" Matte Tin Plating.
Under Plating: Nickel Plating 50u" thickness Min. over all
Housing: See the Part No.

Product Specification Refer To : EK-QB-GC-290A

Operating temperatures: Gold Plated: -55°C to +105°C
Tin plated: -40°C to +105°C

Part No: WFJD12 XXX XX XX X D X 17




PIN数: 006 (2x3P)
008 (2x4P)
010 (2x5P)
..... 以此类推

DIM"L"/麦拉/包装方式:
A: 1.9mm/有麦拉/卷装 PH: 28.0mm
B: 3.5mm/有麦拉/卷装 PH: 28.0mm


电镀规格:
T3: 100u" 雾锡 (Matte Tin)
G1: 全金1u" (Full Gold Flash)
G6: 全金测点镀金10u"
G7: 全金测点镀金15u"
G8: 全金测点镀金30u"
M7: 半金雾锡测点镀金10u"
M7: 半金雾锡测点镀金15u"
M8: 半金雾锡测点镀金30u"

定位柱规格:
N: 无定位柱
K: 带外侧双卡柱
W: 左侧单外卡柱 (筋条方向)
M: 右侧单外卡柱 (无筋条方向)

HOUSING 塑胶材质:
DB: LCP 黑色 (Black) HF
DN: LCP 本色 (Natural) HF

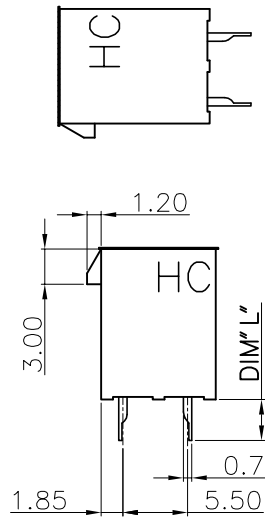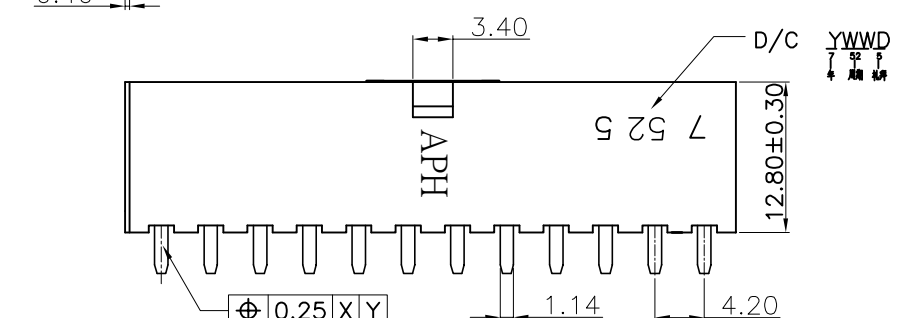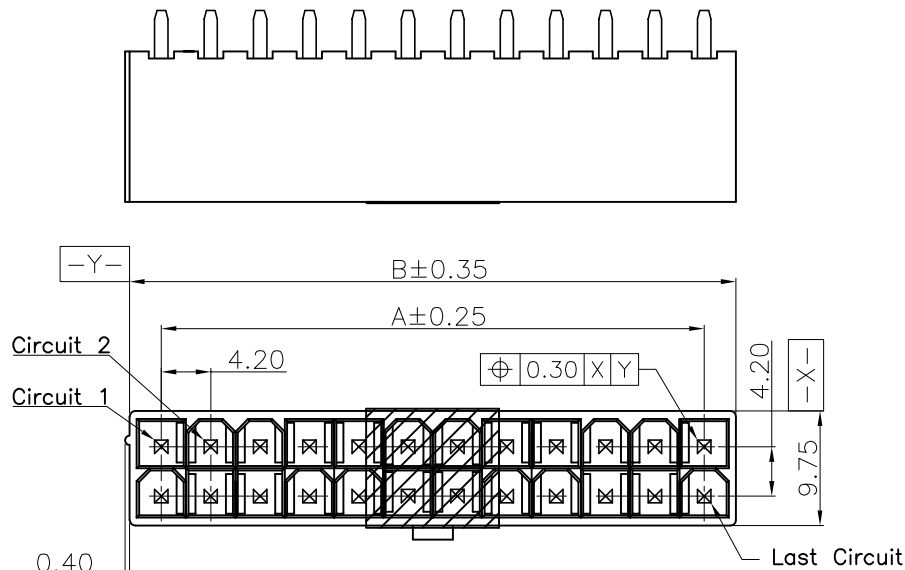

YWWD
Y
W
W
D

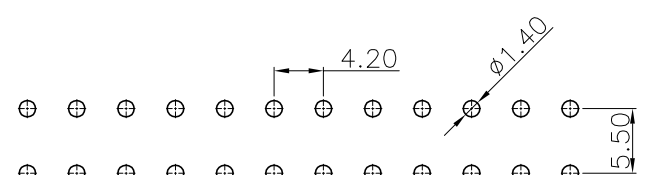

Recommended P.C.B Layout
General Tolerance ±0.05


Pin	Dimensions	
	A	B
2x3PIN	8.40	13.80
2x4PIN	12.60	18.00
2x5PIN	16.80	22.20
2x6PIN	21.00	26.40
2x7PIN	25.20	30.60
2x8PIN	29.40	34.80
2x9PIN	33.60	39.00
2x10PIN	37.80	43.20
2x11PIN	42.00	47.40
2x12PIN	46.20	51.60

ANYCONN® 东莞市恩康电子科技有限公司
www.enkcom.com
TEL: +86(0)769 8904 9672
FAX: +86(0)769 8904 9671
E-MAIL: sales@anyconn.tw
DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD


TOLERANCE	DATE :	2023-03-18	TITLE: Mini Power Plus Connect PH4.20 Straight DIP Type With Mylar		
ANGLE ±5°	DRAWN :	D.Y.Y			
X.XXX ±0.10	CHECKED :		PART NO: WFJD12XXXXXXXXDX17		
X.XX ±0.20	APPROVED :				
X.X ±0.30	PROJECTON				
X. ±0.50	REV: A0	UNIT: mm	SCALE: 1:1	SIZE: A4	PAGE: 1/2

零件图	成品图	客户图
		○


REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	D.Y.Y	2023-03-18




2x3PIN

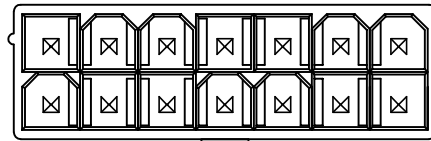


2x7PIN

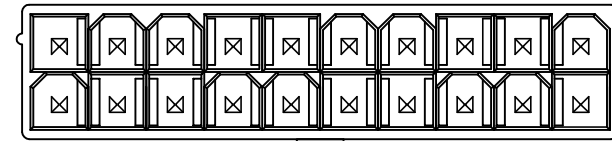


2x10PIN

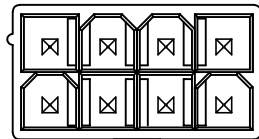


2x4PIN

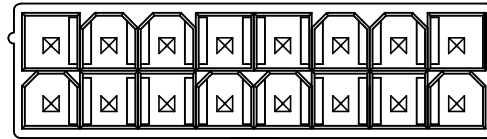


2x8PIN

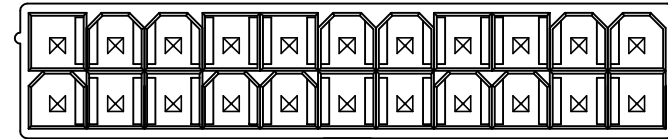


2x11PIN

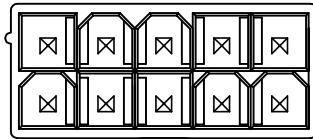


2x5PIN

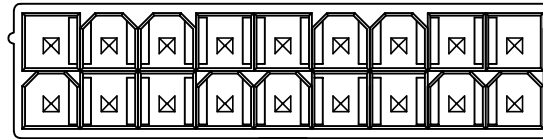

2x9PIN

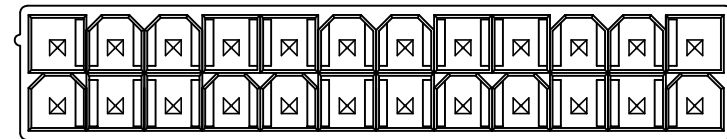

2x12PIN

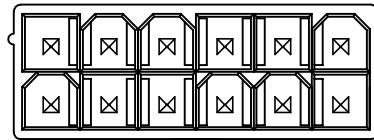

2x6PIN

KEY'S DISPLAY DESCRIPTION

ANYCONN®
 www.enkcom.com
 TEL:+86(0)769 8904 9672
 FAX:+86(0)769 8904 9671
 E-MAIL:sales@anycom.tw

东莞市恩康电子科技有限公司

DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE	DATE :	2023-03-18	TITLE:		
ANGLE ±5°	DRAWN :	D.Y.Y	Mini Power Plus Connect PH4.20 Straight DIP Type With Mylar		
X.XXX ±0.10	CHECKED :		PART NO: WFJD12XXXXXXXXDX17		
X.XX ±0.20	APPROVED :				
X.X ±0.30	PROJECTON		REV: A0	UNIT: mm	SCALE: 1:1
X. ±0.50			SIZE: A4	PAGE: 2/2	